760125245 | N-006-DZ-5L-FSUAQ

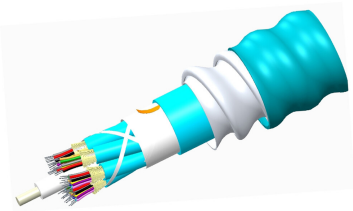

Fiber indoor cable, LazrSPEED® Riser/LSZH rated Distribution, interlocking aluminum armored, Multimode OM3, 6 fiber single-unit, Gel-free, Feet jacket marking, Aqua jacket color

Product Classification

Regional Availability	Asia | Australia/New Zealand | EMEA | Latin America | North America
Portfolio	CommScope®
Product Type	Fiber indoor cable
Product Series	N-DZ

General Specifications

Armor Type	Interlocking aluminum
Cable Type	Distribution
Construction Type	Armored
Subunit Type	Gel-free
Jacket Color	Aqua
Jacket Marking	Feet
Total Fiber Count	6

Dimensions

Diameter Over Armor	10.8 mm | 0.425 in
Diameter Over Jacket	12.8 mm | 0.504 in

Representative Image

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: September 20, 2024

760125245 | N-006-DZ-5L-FSUAQ

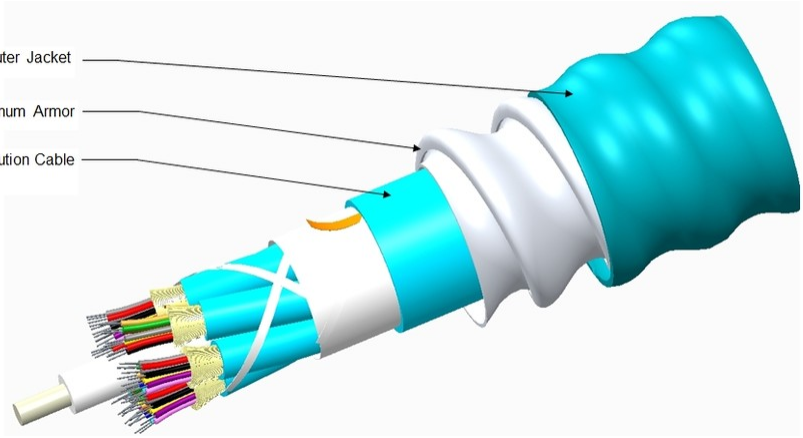

Mechanical Specifications

Minimum Bend Radius, loaded	192 mm | 7.559 in
Minimum Bend Radius, unloaded	128 mm | 5.039 in
Tensile Load, long term, maximum	200 N | 44.962 lbf
Tensile Load, short term, maximum	667 N | 149.948 lbf
Compression	85 N/mm | 485.363 lb/in
Compression Test Method	FOTP-41 | IEC 60794-1 E3
Flex	25 cycles
Flex Test Method	FOTP-104 | IEC 60794-1 E6
Impact	35 N-m | 309.776 in lb
Impact Test Method	FOTP-25 | IEC 60794-1 E4
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33 | IEC 60794-1 E1
Twist	10 cycles
Twist Test Method	FOTP-85 | IEC 60794-1 E7
Vertical Rise, maximum	146 m | 479.003 ft

Optical Specifications

Fiber Type	OM3, LazrSPEED® 300 | OM3, LazrSPEED® 300

Environmental Specifications

Installation temperature	-10 °C to +60 °C (+14 °F to +140 °F)
Operating Temperature	-20 °C to +70 °C (-4 °F to +158 °F)

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: September 20, 2024

Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Cable Qualification Standards	ANSI/ICEA S-83-596 | Telcordia GR-409
Environmental Space	Low Smoke Zero Halogen (LSZH) | Riser
Flame Test Listing	NEC OFCR-ST1 (ETL) and c(ETL)
Flame Test Method	IEC 60332-3 | IEC 60754-2 | IEC 61034-2 | UL 1666 | UL 1685

Environmental Test Specifications

Heat Age	-20 °C to +85 °C (-4 °F to +185 °F)
Heat Age Test Method	IEC 60794-1 F9
Low High Bend	-10 °C to +60 °C (+14 °F to +140 °F)
Low High Bend Test Method	FOTP-37 | IEC 60794-1 E11
Temperature Cycle	-20 °C to +70 °C (-4 °F to +158 °F)
Temperature Cycle Test Method	FOTP-3 | IEC 60794-1 F1

Packaging and Weights

Cable weight	140 kg/km | 94.076 lb/kft

Regulatory Compliance/Certifications

Agency	Classification
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system

Included Products

CS-5L-TB	–	LazrSPEED® 300 OM3 Bend-Insensitive Multimode Fiber

* Footnotes

Operating Temperature Specification applicable to non-terminated bulk fiber cable

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: September 20, 2024

CS-5L-TB

LazrSPEED® 300 OM3 Bend-Insensitive Multimode Fiber

LazrSPEED® 300

Product Classification

Portfolio	CommScope®
Product Type	Optical fiber

General Specifications

Cladding Diameter	125 µm
Cladding Diameter Tolerance	±0.8 µm
Cladding Non-Circularity, maximum	1 %
Coating Diameter (Colored)	254 µm
Coating Diameter (Uncolored)	245 µm
Coating Diameter Tolerance (Colored)	±7 µm
Coating Diameter Tolerance (Uncolored)	±10 µm
Coating/Cladding Concentricity Error, maximum	12 µm
Core Diameter	50 µm
Core Diameter Tolerance	±2.5 µm
Core/Clad Offset, maximum	1.5 µm
Proof Test	689.476 N/mm² | 100000 psi
Tight Buffer Diameter	900 µm
Tight Buffer Diameter Tolerance	±40 µm

Mechanical Specifications

Macrobending, 15 mm Ø mandrel, 2 turns	0.20 dB @ 850 nm | 0.50 dB @ 1,300 nm
Macrobending, 30 mm Ø mandrel, 2 turns	0.10 dB @ 850 nm | 0.30 dB @ 1,300 nm
Macrobending, 75 mm Ø mandrel, 100 turns	0.50 dB @ 1,300 nm | 0.50 dB @ 850 nm
Coating Strip Force, maximum	8.9 N | 2.001 lbf

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: September 20, 2024

Coating Strip Force, minimum	1.3 N | 0.292 lbf
Dynamic Fatigue Parameter, minimum	18

Optical Specifications

Numerical Aperture	0.2
Numerical Aperture Tolerance	±0.015
Point Defects, maximum	0.15 dB
Zero Dispersion Slope, maximum	0.105 ps/[km-nm-nm]
Zero Dispersion Wavelength, maximum	1316 nm
Zero Dispersion Wavelength, minimum	1297 nm

Optical Specifications, Wavelength Specific

1 Gbps Ethernet Distance	1,020 m @ 850 nm | 600 m @ 1,300 nm
10 Gbps Ethernet Distance	300 m @ 850 nm
Attenuation, maximum	1.00 dB/km @ 1,300 nm | 3.00 dB/km @ 850 nm
Backscatter Coefficient	-68.0 dB @ 850 nm | -75.7 dB @ 1,300 nm
Bandwidth, Laser, minimum	2,000 MHz-km @ 850 nm | 500 MHz-km @ 1,300 nm
Bandwidth, OFL, minimum	1,500 MHz-km @ 850 nm | 500 MHz-km @ 1,300 nm
Differential Mode Delay	0.70 ps/m @ 850 nm
Differential Mode Delay Note	Superior to ANSI/TIA TIA-492AAAF and IEC 60793-2-10 at 850 nm
Index of Refraction	1.479 @ 1,300 nm | 1.483 @ 850 nm
Standards Compliance	ANSI/TIA-492AAAF (OM3)

Environmental Specifications

Heat Aging, maximum	0.20 dB/km @ 85 °C
Temperature Dependence, maximum	0.1 dB/km
Temperature Humidity Cycling, maximum	0.2 dB/km
Water Immersion, maximum	0.20 dB/km @ 23 °C

Regulatory Compliance/Certifications

Agency	Classification
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system

* Footnotes

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: September 20, 2024

COMMSCOPE®

Temperature Dependence, maximum	Temperature dependence is conducted at -60 °C to +85 °C (-76 °F to +185 °F)
Temperature Humidity Cycling, maximum	Temperature humidity cycling is conducted at -10 °C to +85 °C (+14 °F to +185 °F) up to 95% relative humidity

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: September 20, 2024