

IFEB30, Indoor Fiber Optic Wall mount Enclosure, Splice / Patch, LC/APC Pigtails and Adapters (48),Single Element Slim trays(12) Smouv, Feeder Cable Seal 4x15mm and 24x7mm drop seal, RAL 9010

- Compact, wall mountable fiber enclosures for indoor use
- Specifically designed for fast FTTH deployment and easy customer connection
- Configurable as splice only or connectorized solution
- Multiple and modular wrap around cable port sealing options to suit a wide range of cables
- Easy intergration of 900µm connectorised or 250µm splice splitters
- Single Element (SE), Single Slim Element (SLE) or Single Circuit (SC) tray options Smouv and ANT
- Powered by NOVUX™

Product Classification

Regional Availability	EMEA
Portfolio	CommScope®
Product Type	Fiber wall box
Product Series	IFEB-30

General Specifications

Functionality	Patching Splicing
Access	Front
Adapter Ports, quantity	48
Cable Ports, quantity	4
Drop Port, quantity	24
Enclosure Color	Pure White (RAL 9010)
Front Cover Type	Snap-on cover
Interface	LC/APC
Pigtails Included, quantity	48
Splice Tray Construction	SLE (Slim element tray for up to 12 primary coated fibers)
Splicing Capacity, maximum	144
Splicing Type	SMOUV
Dimensions	

Height

340 mm | 13.386 in


Page 1 of 4


©2025 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: April 30, 2025



Height, with cover	420 mm	16.535 in
Width	240 mm	9.449 in
Depth	120 mm	4.724 in

Dimension Drawing

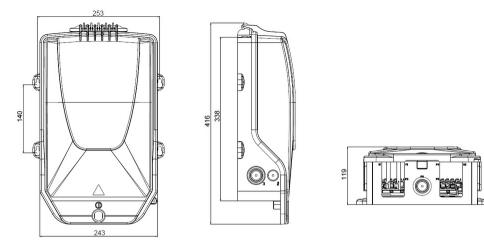




Ordering Tree

Page 2 of 4

©2025 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: April 30, 2025



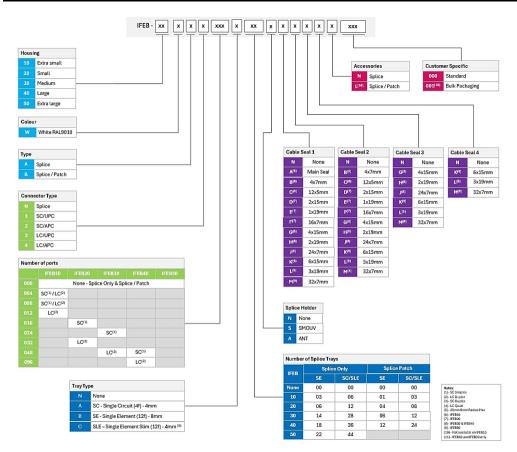

Environmental Specifications

Installation temperature	-5 °C to +45 °C (+23 °F to +113 °F)	
Operating Temperature	-10 °C to +60 °C (+14 °F to +140 °F)	
Environmental Space	Indoor	
Flammability Rating	UL 94 V-0	
Qualification Standards	IEC 60529, IP50 IEC 61753-1 Ed.2 2018 - Category C	

Packaging and Weights

Included	Adapters (24) Box (1) Drop Seal, 24x7 (1) Feeder Seal, 4x15 (1) SLE Smouv trays (12)
Packaging quantity	1
Packaging Type	Box

Regulatory Compliance/Certifications

Page 3 of 4

©2025 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: April 30, 2025

COMMSCOPE®

Agency

CHINA-ROHS

ROHS

UK-ROHS



Classification

Above maximum concentration value

Compliant/Exempted

Compliant/Exempted



©2025 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: April 30, 2025

