MB120-085-SL-HEX



STARLINE® MB120 Broadband RF Amplifier, 1.2 GHz GaN output, 5-85 MHz/102-1218 MHz Bandpass split, 27 dB Upstream gain, Electronic module only, Powering option X

- *Product complies with the Build America, Buy America Act (BABAA) requirements of the Infrastructure Investment and Jobs Act of 2021 (Pub. L. 117- 58, §§ 70901-70953), or is the subject of a waiver approved by the Secretary of Commerce or designee. Compliance requirements and waiver applicability vary based on government funding program. Check the laws and regulations for your specific program.
- Supports 1.2 GHz Downstream and 204 MHz Upstream bandpass for DOCSIS® 3.1 migration
- Modular RF Electronics package with upgradable frequency split options
- Increased gain to allow drop in upgrades for ≥ 750 MHz spacing
- Mechanically compatible with legacy BLE™ amplifier housings
- Expand return path bandwidth with support up to 204 MHz
- Analog and QAM ADU options for automatic gain control (AGC). AGC mode will revert to gain hold mode in the event of pilot loss.

Product Classification

Regional Availability

Asia | Australia/New Zealand | EMEA | Latin America | North America

Product Type RF amplifier
Product Series MB120

Government RequirementsBuild America Buy America (BABA) compliant*

General Specifications

Technology 1.2 GHz GaN output **Housing** Electronic Module only

Location of Manufacturing Waived per BABA waiver for BEAD Program

Dimensions

 Width
 243.84 mm | 9.6 in

 Depth
 139.7 mm | 5.5 in

 Length
 391.16 mm | 15.4 in

Electrical Specifications

Upstream Gain 27 dB

Bandpass Split 5-85 MHz / 102-1218 MHz

COMMSCOPE®


MB120-085-SL-HEX

Input Voltage Range, ac 38-90 V

Level Control QADU-711.00/S

Reference Slope 16.1 dB Total (11.1 dB Cable + 5.0 dB Linear)

Ordering Tree

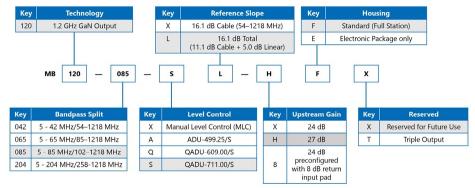

NOTE: Not all combinations of options are valid. Contact your CommScope representative for assistance.

Environmental Specifications

Operating Temperature -40 °C to +60 °C (-40 °F to +140 °F)

Packaging and Weights

Weight, net 6.804 kg | 15 lb

Regulatory Compliance/Certifications

Agency Classification

CHINA-ROHS Above maximum concentration value

ROHS Compliant/Exempted UK-ROHS Compliant/Exempted

