760007898 | R-004-DS-CM-FSUAQ/8W002/5L002



Fiber indoor cable, TeraSPEED® Riser Distribution, Multimode composite, 4 fiber single-unit, Feet jacket marking, Aqua jacket color

Product Classification

Regional Availability	Asia | Australia/New Zealand | Latin America | Middle East/Africa | North America
Portfolio	CommScope®
Product Type	Fiber indoor cable
Product Series	R-DS

General Specifications

Cable Type	Distribution
Construction Type	Non-armored
Subunit Type	Gel-free
Jacket Color	Aqua
Jacket Marking	Feet
Composite Fiber Count	2 + 2
Total Fiber Count	4

Dimensions

Diameter Over Jacket	4.65 mm | 0.183 in

Representative Image

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: September 20, 2024

760007898 | R-004-DS-CM-FSUAQ/8W002/5L002

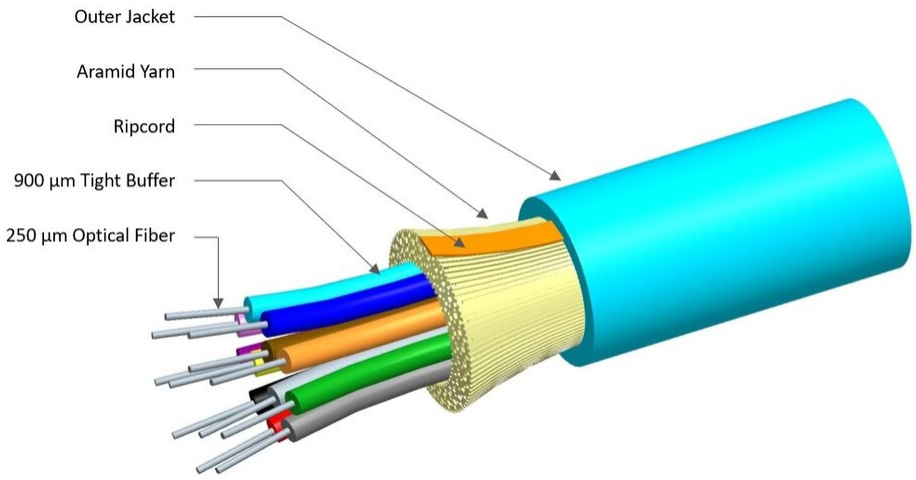

Mechanical Specifications

Minimum Bend Radius, loaded	70 mm | 2.756 in
Minimum Bend Radius, unloaded	46 mm | 1.811 in
Tensile Load, long term, maximum	200 N | 44.962 lbf
Tensile Load, short term, maximum	667 N | 149.948 lbf
Compression	10 N/mm | 57.101 lb/in
Compression Test Method	FOTP-41 | IEC 60794-1 E3
Flex	100 cycles
Flex Test Method	FOTP-104 | IEC 60794-1 E6
Impact	2.94 N-m | 26.021 in lb
Impact Test Method	FOTP-25 | IEC 60794-1 E4
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33 | IEC 60794-1 E1
Twist	10 cycles
Twist Test Method	FOTP-85 | IEC 60794-1 E7
Vertical Rise, maximum	500 m | 1,640.42 ft

Optical Specifications

Fiber Type	Composite MM/SM | G.652.D and G.657.A1, TeraSPEED® | OM3, LazrSPEED® 300

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: September 20, 2024

Environmental Specifications

Installation temperature	-20 °C to +70 °C (-4 °F to +158 °F)
Operating Temperature	-20 °C to +70 °C (-4 °F to +158 °F)
Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Cable Qualification Standards	ANSI/ICEA S-83-596 | Telcordia GR-409
Environmental Space	Riser
Flame Test Listing	NEC OFNR (ETL) and c(ETL)
Flame Test Method	UL 1666

Environmental Test Specifications

Heat Age	-20 °C to +85 °C (-4 °F to +185 °F)
Heat Age Test Method	IEC 60794-1 F9
Low High Bend	-20 °C to +70 °C (-4 °F to +158 °F)
Low High Bend Test Method	FOTP-37 | IEC 60794-1 E11
Temperature Cycle	-20 °C to +70 °C (-4 °F to +158 °F)
Temperature Cycle Test Method	FOTP-3 | IEC 60794-1 F1

Packaging and Weights

Cable weight	19 kg/km | 12.767 lb/kft

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant
UK-ROHS	Compliant

Included Products

- CS-5L-TB – LazrSPEED® 300 OM3 Bend-Insensitive Multimode Fiber
- CS-8W-TB – TeraSPEED® Singlemode Fiber

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: September 20, 2024

* Footnotes

Operating Temperature Specification applicable to non-terminated bulk fiber cable

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: September 20, 2024