

Fiber indoor cable, LazrSPEED® Plenum MPO Light Duty for Patchcords, 12 fiber, Multimode OM3, Feet jacket marking, Aqua jacket color

Product Classification

|                       |   |
|-----------------------|---|
| Regional Availability | Asia   Australia/New Zealand   Latin America   Middle East/Africa   North America |
| Portfolio             | CommScope®  |
| Product Type          | Fiber indoor cable  |
| Product Series        | P-MP  |


General Specifications

|                   |                 |
|-------------------|-----------------|
| Cable Type        | MPO trunk cable |
| Construction Type | Non-armored     |
| Subunit Type      | Gel-free        |
| Jacket Color      | Aqua            |
| Jacket Marking    | Feet            |
| Total Fiber Count | 12              |

Dimensions

|                      |                 |
|----------------------|-----------------|
| Diameter Over Jacket | 3 mm   0.118 in |
|----------------------|-----------------|

Representative Image

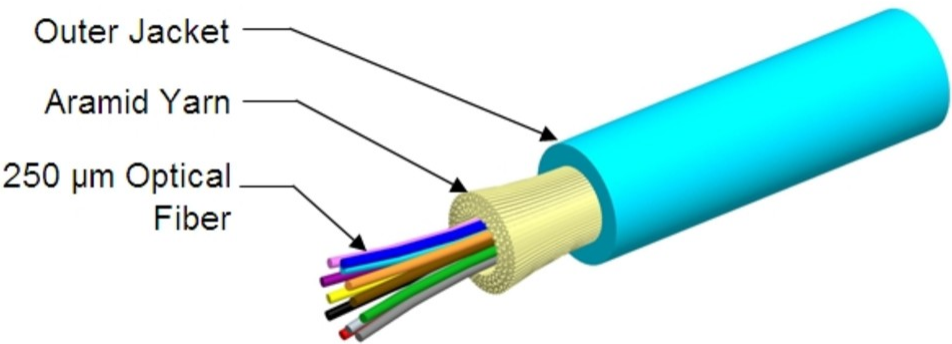

## Mechanical Specifications

|  |                                       |
|--|---------------------------------------|
| <b>Minimum Bend Radius, loaded</b>       | 45 mm   1.772 in                      |
| <b>Minimum Bend Radius, unloaded</b>     | 24 mm   0.945 in                      |
| <b>Tensile Load, long term, maximum</b>  | 100 N   22.481 lbf                    |
| <b>Tensile Load, short term, maximum</b> | 334 N   75.086 lbf                    |
| <b>Compression</b>                       | 4 N/mm   22.841 lb/in                 |
| <b>Compression Test Method</b>           | FOTP-41   IEC 60794-1 E3              |
| <b>Flex</b>                              | 300 cycles                            |
| <b>Flex Test Method</b>                  | FOTP-104   IEC 60794-1 E6             |
| <b>Impact</b>                            | 0.74 N-m   6.55 in lb                 |
| <b>Impact Test Method</b>                | FOTP-25   IEC 60794-1 E4              |
| <b>Strain</b>                            | See long and short term tensile loads |
| <b>Strain Test Method</b>                | FOTP-33   IEC 60794-1 E1              |
| <b>Twist</b>                             | 10 cycles                             |
| <b>Twist Test Method</b>                 | FOTP-85   IEC 60794-1 E7              |
| <b>Vertical Rise, maximum</b>            | 500 m   1,640.42 ft                   |

## Optical Specifications

|                   |   |
|-------------------|---|
| <b>Fiber Type</b> | OM3, LazrSPEED® 300   OM3, LazrSPEED® 300 |
|-------------------|---|

## Environmental Specifications

|                                      |                                       |
|--------------------------------------|---------------------------------------|
| <b>Installation temperature</b>      | 0 °C to +70 °C (+32 °F to +158 °F)    |
| <b>Operating Temperature</b>         | 0 °C to +70 °C (+32 °F to +158 °F)    |
| <b>Storage Temperature</b>           | -40 °C to +70 °C (-40 °F to +158 °F)  |
| <b>Cable Qualification Standards</b> | ANSI/ICEA S-83-596   Telcordia GR-409 |
| <b>Environmental Space</b>           | Plenum                                |
| <b>Flame Test Listing</b>            | NEC OFNP (ETL) and c(ETL)             |
| <b>Flame Test Method</b>             | NFPA 130   NFPA 262                   |

## Environmental Test Specifications

|                             |                                    |
|-----------------------------|------------------------------------|
| <b>Heat Age</b>             | 0 °C to +85 °C (+32 °F to +185 °F) |
| <b>Heat Age Test Method</b> | IEC 60794-1 F9                     |

|                               |                                    |
|-------------------------------|------------------------------------|
| Low High Bend                 | 0 °C to +70 °C (+32 °F to +158 °F) |
| Low High Bend Test Method     | FOTP-37   IEC 60794-1 E11          |
| Temperature Cycle             | 0 °C to +70 °C (+32 °F to +158 °F) |
| Temperature Cycle Test Method | FOTP-3   IEC 60794-1 F1            |

Packaging and Weights

|              |                        |
|--------------|------------------------|
| Cable weight | 9 kg/km   6.048 lb/kft |
|--------------|------------------------|

Regulatory Compliance/Certifications

| Agency        | Classification   |
|---------------|--|
| CHINA-ROHS    | Below maximum concentration value  |
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system   |
| REACH-SVHC    | Compliant as per SVHC revision on <a href="http://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a> |
| ROHS          | Compliant  |
| UK-ROHS       | Compliant  |



Included Products

|          |   |
|----------|---|
| CS-5L-MP | – LazrSPEED® 300 OM3 Bend-Insensitive Multimode Fiber |
|----------|---|

\* Footnotes

**Operating Temperature** Specification applicable to non-terminated bulk fiber cable

## LazrSPEED® 300 OM3 Bend-Insensitive Multimode Fiber

### LazrSPEED® 300

#### Product Classification

|              |               |
|--------------|---------------|
| Portfolio    | CommScope®    |
| Product Type | Optical fiber |

#### General Specifications

|   |                        |
|---|------------------------|
| Cladding Diameter                             | 125 µm                 |
| Cladding Diameter Tolerance                   | ±5 µm                  |
| Cladding Non-Circularity, maximum             | 1 %                    |
| Coating Diameter (Colored)                    | 254 µm                 |
| Coating Diameter (Uncolored)                  | 245 µm                 |
| Coating Diameter Tolerance (Colored)          | ±7 µm                  |
| Coating Diameter Tolerance (Uncolored)        | ±10 µm                 |
| Coating/Cladding Concentricity Error, maximum | 12 µm                  |
| Core Diameter                                 | 50 µm                  |
| Core Diameter Tolerance                       | ±2.5 µm                |
| Core/Clad Offset, maximum                     | 1.5 µm                 |
| Proof Tensile Stress                          | 100,000 psi (0.69 GPa) |

#### Mechanical Specifications

|  |                                       |
|--|---------------------------------------|
| Macrobending, 15 mm Ø mandrel, 2 turns   | 0.20 dB @ 850 nm   0.50 dB @ 1,300 nm |
| Macrobending, 30 mm Ø mandrel, 2 turns   | 0.10 dB @ 850 nm   0.30 dB @ 1,300 nm |
| Macrobending, 75 mm Ø mandrel, 100 turns | 0.50 dB @ 1,300 nm   0.50 dB @ 850 nm |
| Coating Strip Force, maximum             | 8.9 N   2.001 lbf                     |
| Coating Strip Force, minimum             | 1.3 N   0.292 lbf                     |
| Dynamic Fatigue Parameter, minimum       | 18                                    |

#### Optical Specifications

|                    |     |
|--------------------|-----|
| Numerical Aperture | 0.2 |
|--------------------|-----|

# CS-5L-MP

|                                     |                     |
|-------------------------------------|---------------------|
| Numerical Aperture Tolerance        | ±0.015              |
| Point Defects, maximum              | 0.15 dB             |
| Zero Dispersion Slope, maximum      | 0.105 ps/[km-nm-nm] |
| Zero Dispersion Wavelength, maximum | 1316 nm             |
| Zero Dispersion Wavelength, minimum | 1297 nm             |

## Optical Specifications, Wavelength Specific

|                              |   |
|------------------------------|---|
| 1 Gbps Ethernet Distance     | 1,020 m @ 850 nm   600 m @ 1,300 nm                           |
| 10 Gbps Ethernet Distance    | 300 m @ 850 nm  |
| Attenuation, maximum         | 1.00 dB/km @ 1,300 nm   3.00 dB/km @ 850 nm                   |
| Backscatter Coefficient      | -68.0 dB @ 850 nm   -75.7 dB @ 1,300 nm                       |
| Bandwidth, Laser, minimum    | 2,000 MHz-km @ 850 nm   500 MHz-km @ 1,300 nm                 |
| Bandwidth, OFL, minimum      | 1,500 MHz-km @ 850 nm   500 MHz-km @ 1,300 nm                 |
| Differential Mode Delay      | 0.70 ps/m @ 850 nm  |
| Differential Mode Delay Note | Superior to ANSI/TIA TIA-492AAAF and IEC 60793-2-10 at 850 nm |
| Index of Refraction          | 1.479 @ 1,300 nm   1.483 @ 850 nm                             |
| Standards Compliance         | ANSI/TIA-492AAAF (OM3)  |

## Environmental Specifications

|                                       |                    |
|---------------------------------------|--------------------|
| Heat Aging, maximum                   | 0.20 dB/km @ 85 °C |
| Temperature Dependence, maximum       | 0.1 dB/km          |
| Temperature Humidity Cycling, maximum | 0.2 dB/km          |
| Water Immersion, maximum              | 0.20 dB/km @ 23 °C |

## Regulatory Compliance/Certifications

| Agency        | Classification   |
|---------------|--|
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |

## \* Footnotes

|                                       |   |
|---------------------------------------|---|
| Temperature Dependence, maximum       | Temperature dependence is conducted at -60 °C to +85 °C (-76 °F to +185 °F)                                   |
| Temperature Humidity Cycling, maximum | Temperature humidity cycling is conducted at -10 °C to +85 °C (+14 °F to +185 °F) up to 95% relative humidity |