


URGQPLUHF

Base Product

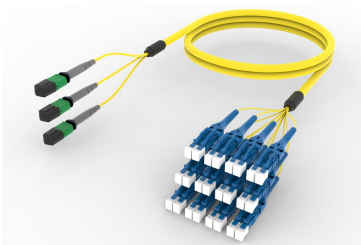

Ultra Low Loss Singlemode, MPO8 QSFP (Unpinned) to LC/UPC Uniboot, Fiber Extension Cable Assembly, 24-Fiber, Low Smoke Zero Halogen

Product Classification

Regional Availability	Australia/New Zealand Europe Latin America Middle East/Africa
Portfolio	CommScope®
Product Type	Fiber array cable assembly
Product Brand	SYSTIMAX ULL
Ordering Note	For additional jacket colors, please contact a CommScope Sales Representative For lengths greater than 999 ft (304 m), orders must be in meters Minimum length may vary based on cable configuration

General Specifications


Color, boot A	Gray
Color, connector A	Green
Color, boot B	Blue
Color, connector B	Blue
Construction Type	Stranded
Furcation Color	Yellow
Interface, Connector A	MPO-08/APC Female
Interface Feature, connector A	QSFP configuration
Interface, Connector B	LC/UPC
Interface Feature, connector B	Uniboot
Jacket Color	Yellow
Polarity	Method B Enhanced (ULL)
Total Fibers, quantity	24

Dimensions

URGQPLUHF

Cable Assembly Length Range (m)	1 – 305
Cable Assembly Length Range (ft)	3 – 999

Ordering Tree

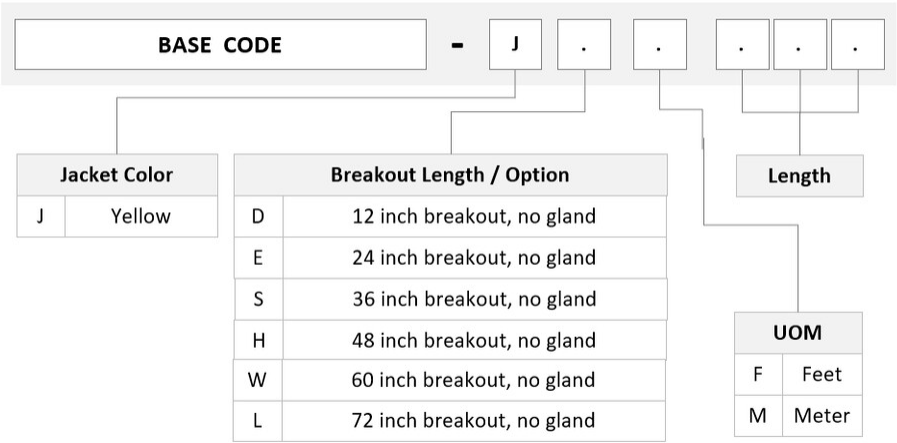

Mechanical Specifications

Cable Retention Strength, maximum	11.24 lb @ 0 ° 4.40 lb @ 90 °
-----------------------------------	---------------------------------

Optical Specifications

Fiber Mode	Singlemode
Fiber Type	G.657.A2, TeraSPEED®

Environmental Specifications

Operating Temperature	-10 °C to +60 °C (+14 °F to +140 °F)
Environmental Space	Indoor Low Smoke Zero Halogen (LSZH)

Regulatory Compliance/Certifications

Agency	Classification
ANATEL	Compliant
CHINA-ROHS	Above maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant/Exempted

URGQPLUHF

UK-ROHS

Compliant/Exempted



Included Products

- | | | |
|---------------------|---|--|
| 760238981 | – | Low Smoke Zero Halogen Riser MPO Trunk Cable, 24 fiber |
| N-024-MP-8G-F24YL/D | | |
| 860637706 | – | MPO8, ULTRA LOW LOSS, FEMALE, Singlemode, GREEN, 3mm |
| 860658160 | – | LC/UPC Uniboot Connector, Singlemode, Blue |