## URVQPMXHF

#### **Base Product**



Ultra Low Loss OM5, MPO8 QSFP (Unpinned) to MPO12 (Pinned), Fiber Extension Cable Assembly, 24-Fiber, Low Smoke Zero Halogen

#### **Product Classification**

Regional Availability

Australia/New Zealand | Europe | Latin America | Middle East/Africa

Portfolio CommScope®

**Product Type** Fiber array cable assembly

Product Brand SYSTIMAX ULL

Ordering Note For additional jacket colors, please contact a CommScope Sales Representative | For

lengths greater than 999 ft (304 m), orders must be in meters | Minimum length may

vary based on cable configuration

#### General Specifications

Color, boot A Gray

Color, connector A Lime green

Color, boot B Black

Color, connector BLime greenConstruction TypeStrandedFurcation ColorLime green

 Interface, Connector A
 MPO-08/UPC Female

 Interface Feature, connector A
 QSFP configuration

Interface, Connector B MPO-12/UPC Male

Jacket Color Lime green

Polarity Method B Enhanced (ULL)

Total Fibers, quantity 24

Dimensions


Cable Assembly Length Range (m) 1 - 305

Cable Assembly Length Range (ft) 1 - 999



## URVQPMXHF

### Ordering Tree

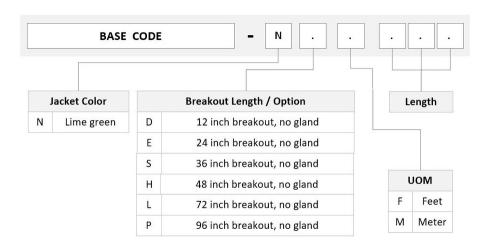

#### Mechanical Specifications

Cable Retention Strength, maximum 11.24 lb @ 0 ° | 4.40 lb @ 90 °

**Optical Specifications** 

Fiber Mode Multimode

**Fiber Type** OM5, LazrSPEED®

#### **Environmental Specifications**

**Operating Temperature**  $-10 \,^{\circ}\text{C} \text{ to } +60 \,^{\circ}\text{C} \text{ (+14 }^{\circ}\text{F to } +140 \,^{\circ}\text{F)}$ 

Environmental Space Indoor | Low Smoke Zero Halogen (LSZH)

#### Regulatory Compliance/Certifications

# Agency Classification ANATEL Compliant

ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system



#### Included Products

760235987 – Fiber indoor cable, LazrSPEED® Low Smoke Zero Halogen Riser Light Duty for MPO N-024-MP-5G-F36LM/D

Page 2 of 3

## URVQPMXHF

Patchcords, 24 fiber, Multimode OM5, Gel-free, Feet jacket marking, Lime green jacket color,

Dca Flame rating

860617232 - MPO12, ULTRA LOW LOSS, FEMALE, OM5, LIME, 3mm 860617240 - MPO12, ULTRA LOW LOSS, MALE, OM5, LIME, 3mm

