


URX2PQPHF

Base Product

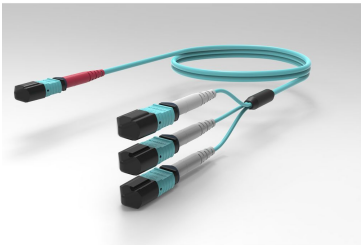

Ultra Low Loss OM4, MPO24 (Unpinned) to MPO8 QSFP (Unpinned), Fiber Extension Cable Assembly, 24-Fiber, Low Smoke Zero Halogen

Product Classification

| | |
|-----------------------|--|
| Regional Availability | Australia/New Zealand Europe Latin America Middle East/Africa |
| Portfolio | CommScope® |
| Product Type | Fiber array cable assembly |
| Product Brand | SYSTIMAX ULL |
| Ordering Note | For additional jacket colors, please contact a CommScope Sales Representative For lengths greater than 999 ft (304 m), orders must be in meters Minimum length may vary based on cable configuration |

General Specifications

| | |
|--------------------------------|-------------------------|
| Color, boot A | Red |
| Color, connector A | Aqua |
| Color, boot B | Gray |
| Color, connector B | Aqua |
| Construction Type | Stranded |
| Furcation Color | Aqua |
| Interface, Connector A | MPO-24/UPC Female |
| Interface, Connector B | MPO-08/UPC Female |
| Interface Feature, connector B | QSFP configuration |
| Jacket Color | Aqua |
| Polarity | Method B Enhanced (ULL) |
| Total Fibers, quantity | 24 |


Dimensions

| | |
|---------------------------------|---------|
| Cable Assembly Length Range (m) | 3 – 999 |
|---------------------------------|---------|

URX2PQPHF

Cable Assembly Length Range (ft)10 – 999

Ordering Tree

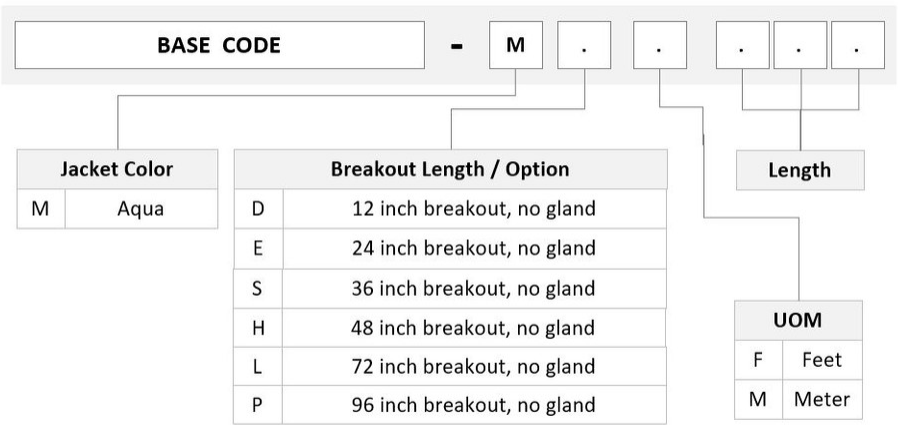

Mechanical Specifications

Cable Retention Strength, maximum11.24 lb @ 0 ° | 4.40 lb @ 90 °

Optical Specifications

Fiber ModeMultimode
Fiber TypeOM4, LazrSPEED®

Environmental Specifications

Operating Temperature-10 °C to +60 °C (+14 °F to +140 °F)
Environmental SpaceIndoor | Low Smoke Zero Halogen (LSZH)

Regulatory Compliance/Certifications

| | |
|---------------|--|
| Agency | Classification |
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |

Included Products

- | | | |
|---------------------|---|--|
| 760256685 | – | Fiber indoor cable, LazrSPEED® Low Smoke Zero Halogen Riser Light Duty for MPO |
| N-024-MP-5K-F30AQ/D | | Patchcords, 24 fiber, Multimode OM4, Gel-free, Feet jacket marking, Aqua jacket color, Dca |
| | | flame rating |
| 860633307 | – | MPO8, ULTRA LOW LOSS, FEMALE, OM3/4, AQUA, 3mm |

URX2PQPHF

860662277 – MPO24,FEMALE,OM3/4,AQUA,3.0MM