
FEWSCSC21

Base Product



Singlemode SC/UPC to SC/UPC, Fiber Patch Cord, 1.6 mm Simplex, Riser

Product Classification

Regional Availability Asia | Australia/New Zealand | Europe | Latin America | Middle East

/Africa | North America

Portfolio CommScope®

Product Type Fiber patch cord, simplex

SYSTIMAX InstaPATCH® 360 **Product Brand**

FEW Product Series

Ordering Note For lengths greater than 999 ft (304 m), orders must be in meters | Minimum length

may vary based on cable configuration

General Specifications

Connector A, quantity 1

Color, boot A Blue

Color, connector A Blue

Connector B, quantity 1

Blue Color, boot B

Color, connector B Blue

Interface, Connector A

Jacket Color Yellow

Polarity Method B

Total Fibers, quantity 1

Dimensions

Interface, Connector B

Cable Assembly Length Range (m) 1 - 999Cable Assembly Length Range (ft) 1 - 999

Diameter Over Jacket 1.6 mm | 0.063 in


COMMSCOPE®

SC/UPC

SC/UPC

FEWSCSC21

Ordering Tree

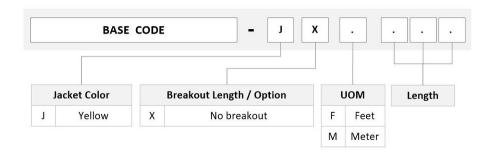

Mechanical Specifications

Cable Retention Strength, maximum 11.24 lb @ 0 ° | 4.40 lb @ 90 °

Optical Specifications

Fiber Mode Singlemode

Fiber Type G.652.D | G.657.A1, TeraSPEED®

Environmental Specifications

Operating Temperature $-10 \,^{\circ}\text{C} \text{ to } +60 \,^{\circ}\text{C} \text{ (+14 }^{\circ}\text{F to } +140 \,^{\circ}\text{F)}$

Environmental Space Riser

Regulatory Compliance/Certifications

assification

CHINA-ROHS Below maximum concentration value

ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system

ROHS Compliant UK-ROHS Compliant



Included Products

760004515 – Fiber indoor cable, TeraSPEED® 1.6 mm Riser Simplex, Singlemode G.652.D and G.657.A1, R-001-SP-8W-F16YL Feet jacket marking, Yellow jacket color

Page 2 of 2