

# RRVV2VV-6533B-R8



16-port sector/multibeam antenna 4x 694–960 MHz, 4x 1695–2690 MHz 65° HPBW and 8x 1710–2690 MHz 2x 2-Beam 33°HPBW, 8x RET

- All Internal RET actuators are connected in “Cascaded SRET” configuration

## General Specifications

Antenna Type	DualPol® multibeam
Band	Multiband
Color	Light Gray (RAL 7035)
Grounding Type	RF connector inner conductor and body grounded to reflector and mounting bracket
Performance Note	Outdoor usage
Radome Material	Fiberglass, UV resistant
Radiator Material	Low loss circuit board
Reflector Material	Aluminum
RF Connector Interface	4.3-10 Female
RF Connector Location	Bottom
RF Connector Quantity, high band	12
RF Connector Quantity, mid band	0
RF Connector Quantity, low band	4
RF Connector Quantity, total	16

## Remote Electrical Tilt (RET) Information


RET Hardware	CommRET v2
RET Interface	8-pin DIN Female   8-pin DIN Male
RET Interface, quantity	2 female   2 male
Input Voltage	10–30 Vdc
Internal RET	High band (6)   Low band (2)
Power Consumption, active state, maximum	8 W
Power Consumption, idle state, maximum	1 W
Protocol	3GPP/AISG 2.0 (Single RET)

# RRVV2VV-6533B-R8

## Dimensions

Width	498 mm   19.606 in
Depth	197 mm   7.756 in
Length	2100 mm   82.677 in
Net Weight, antenna only	46 kg   101.413 lb

## Array Layout

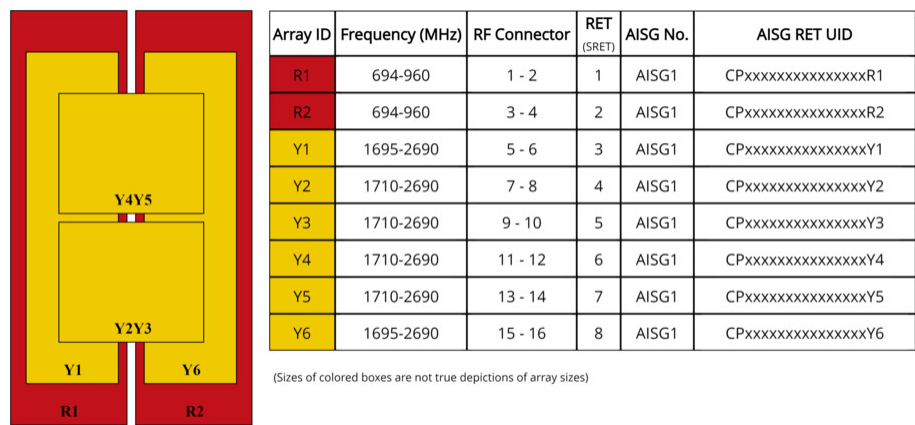

## Port Configuration



# RRVV2VV-6533B-R8

## Electrical Specifications

Impedance	50 ohm
Operating Frequency Band	1695 – 2690 MHz   1710 – 2690 MHz   694 – 960 MHz
Polarization	±45°
Total Input Power, maximum	1,700 W @ 50 °C

## Electrical Specifications

Frequency Band, MHz	694–790	790–890	890–960	1695–2180	2300–2690	1710–2180	2300–2690
Gain, dBi	14.6	14.9	15.2	16.9	18.6	18.2	19
Beam Centers, Horizontal, degrees						±27	±23
Beamwidth, Horizontal, degrees	75	66	65	72	56	34	27
Beamwidth, Vertical, degrees	11.4	10.1	9.4	6.3	5.1	8	6.3
Beam Tilt, degrees	2–12	2–12	2–12	2–12	2–12	2–12	2–12
USLS (First Lobe), dB	16	16	15	21	21	16	18
Front-to-Back Ratio at 180°, dB	30	30	29	34	34	37	32
CPR at Boresight, dB	21	21	19	21	22	18	20
Isolation, Cross Polarization, dB	25	25	25	25	25	25	25
Isolation, Inter-band, dB	25	25	25	25	25	25	25
Isolation, Beam to Beam, dB						17	17
VSWR   Return loss, dB	1.5   14.5	1.5   14.5	1.5   14.5	1.5   14.5	1.5   14.5	1.5   14.5	1.5   14.5
PIM, 3rd Order, 2 x 20 W, dBc	-150	-150	-150	-150	-150	-150	-150
Input Power per Port at 50°C, maximum, watts	250	250	250	200	150	200	150

## Mechanical Specifications

Effective Projective Area (EPA), frontal	0.68 m²   7.319 ft²
Effective Projective Area (EPA), lateral	0.21 m²   2.26 ft²
Wind Loading @ Velocity, frontal	728.0 N @ 150 km/h (163.7 lbf @ 150 km/h)
Wind Loading @ Velocity, lateral	223.0 N @ 150 km/h (50.1 lbf @ 150 km/h)
Wind Loading @ Velocity, maximum	873.0 N @ 150 km/h (196.3 lbf @ 150 km/h)
Wind Loading @ Velocity, rear	501.0 N @ 150 km/h (112.6 lbf @ 150 km/h)
Wind Speed, maximum	241 km/h (150 mph)

# RRVV2VV-6533B-R8

---

## Packaging and Weights

Width, packed	565 mm   22.244 in
Depth, packed	309 mm   12.165 in
Length, packed	2287 mm   90.039 in
Weight, gross	61.4 kg   135.364 lb

## Regulatory Compliance/Certifications

Agency	Classification
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system

## Included Products

BSAMNT-4	–	Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.
----------	---	--

## \* Footnotes

Performance Note	Severe environmental conditions may degrade optimum performance
------------------	---