


CS2725-000 | OC-ADP-L5-L5-NNCD-AQUA



Fiber Optic Duplex Adapter, Multimode LC/UPC, Aqua, with flanges


Product Classification

| | |
|-----------------------|---|
| Regional Availability | Asia Australia/New Zealand EMEA Latin America North America |
| Product Type | Fiber adapter |
| Product Series | OC-ADP |

General Specifications

| | |
|------------------------|------------------------------|
| Body Style | Duplex |
| Color | Aqua |
| Interface | LC/UPC |
| Mounting | Square flange |
| Total Ports, quantity | 2 |
| Transmission Standards | IEC 60754-1 IEC 61300-3-42 |

Outline Drawing

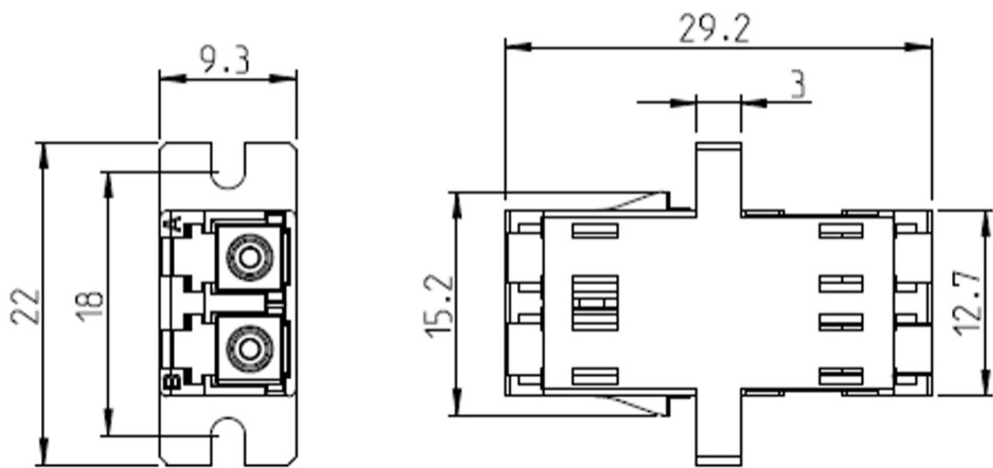

Material Specifications

Alignment Sleeve Material Ceramic

Mechanical Specifications

Coupling Retention Force 70 N | 15.737 lbf

Optical Specifications

Fiber Mode Multimode

Insertion Loss, maximum 0.1 dB

Environmental Specifications

Operating Temperature -40 °C to +70 °C (-40 °F to +158 °F)

Packaging and Weights

Packaging quantity 1

Packaging Type Bag

Regulatory Compliance/Certifications

| Agency | Classification |
|------------|---|
| CHINA-ROHS | Below maximum concentration value |
| REACH-SVHC | Compliant as per SVHC revision on www.commscope.com/ProductCompliance |
| ROHS | Compliant |

UK-ROHS

Compliant

