



Fiber indoor/outdoor cable, Loose Tube Gel-filled, 72 fiber, Singlemode G. 652.D and G.657.A1, Meters jacket marking, Black jacket color

Product Classification

Regional Availability	Asia   Australia/New Zealand
Portfolio	CommScope®
Product Type	Fiber indoor/outdoor cable
Product Series	C-LN


General Specifications

Cable Type	Stranded loose tube
Construction Type	Non-armored
Subunit Type	Gel-filled
Jacket Color	Black
Jacket Marking	Meters
Fibers per Subunit, quantity	12
Total Fiber Count	72

Dimensions

Buffer Tube/Subunit Diameter	2.1 mm   0.083 in
Diameter Over Jacket	10.7 mm   0.421 in

Representative Image

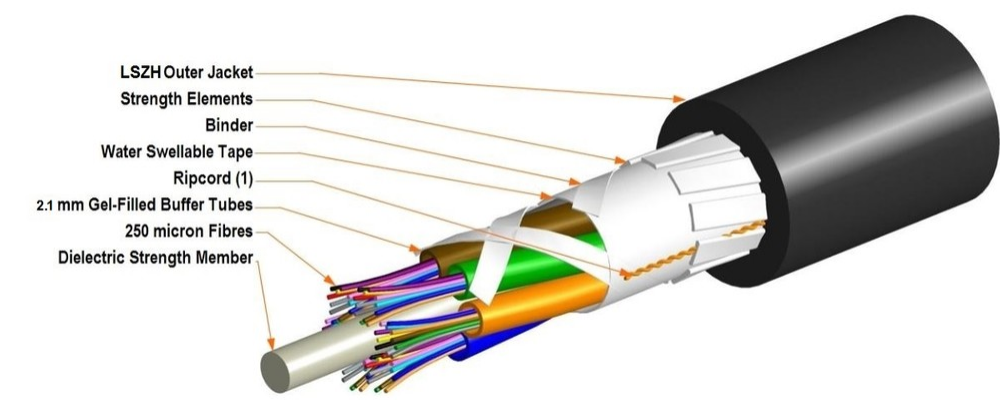

## Mechanical Specifications

Minimum Bend Radius, loaded	214 mm   8.425 in
Minimum Bend Radius, unloaded	107 mm   4.213 in
Tensile Load, long term, maximum	890 N   200.08 lbf
Tensile Load, short term, maximum	2700 N   606.984 lbf
Compression	10 N/mm   57.101 lb/in
Compression Test Method	IEC 60794-1-2 E3
Strain	See long and short term tensile loads
Strain Test Method	IEC 60794-1-21 E1

## Optical Specifications

Fiber Type	G.652.D and G.657.A1   OS2
------------	----------------------------

## Optical Specifications, Wavelength Specific

Attenuation, maximum	0.3 dB/km @ 1,550 nm   0.3 dB/km @ 1,625 nm   0.4 dB/km @ 1,310 nm
----------------------	--

## Environmental Specifications

Installation temperature	-10 °C to +60 °C (+14 °F to +140 °F)
Operating Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Environmental Space	Buried   Ducted   Indoor/Outdoor   Low Smoke Zero Halogen (LSZH)
Flame Test Method	IEC 60332-1
Water Penetration	24 h
Water Penetration Test Method	IEC 60794-1 F5B

Environmental Test Specifications

Temperature Cycle	-40 °C to +70 °C (-40 °F to +158 °F)
Temperature Cycle Test Method	IEC 60794-1-2 F1

Packaging and Weights

Cable weight	117 kg/km   78.62 lb/kft
--------------	--------------------------

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a>
ROHS	Compliant
UK-ROHS	Compliant



\* Footnotes

Operating Temperature	Specification applicable to non-terminated bulk fiber cable
-----------------------	---