

FPX-5FS7/0ARU152



FPX Fiber Optic Termination Panel with Indoor/Outdoor Cable, 5RU, 19in, Singlemode, 144 fiber, SC/UPC connectors, Stub tail at far end, putty white, 152m

Product Classification

Regional Availability	Latin America North America
Portfolio	CommScope®
Product Type	Fiber patch panel, with indoor/outdoor cable
Product Series	FPX

General Specifications

Functionality	Patching
Adapter Packs Included, quantity	12
Body Style	Symmetrical
Cable Exit Location	Upward
Cable Stub Type	Indoor/Outdoor
Color	Putty white
Growth Configuration	Fully loaded
Interface, front	SC/UPC
Interface, rear	Stub tail
Rack Type	EIA 19 in EIA 23 in
Rack Units	5
Shelf Movement	Sliding
Total Fibers, quantity	144
Total Ports, quantity	144

Dimensions


Height	222.25 mm 8.75 in
Width	482.6 mm 19 in

FPX-5FS7/0ARU152

Depth 304.8 mm | 12 in

Cable Length 152 m | 498.688 ft

Ordering Tree

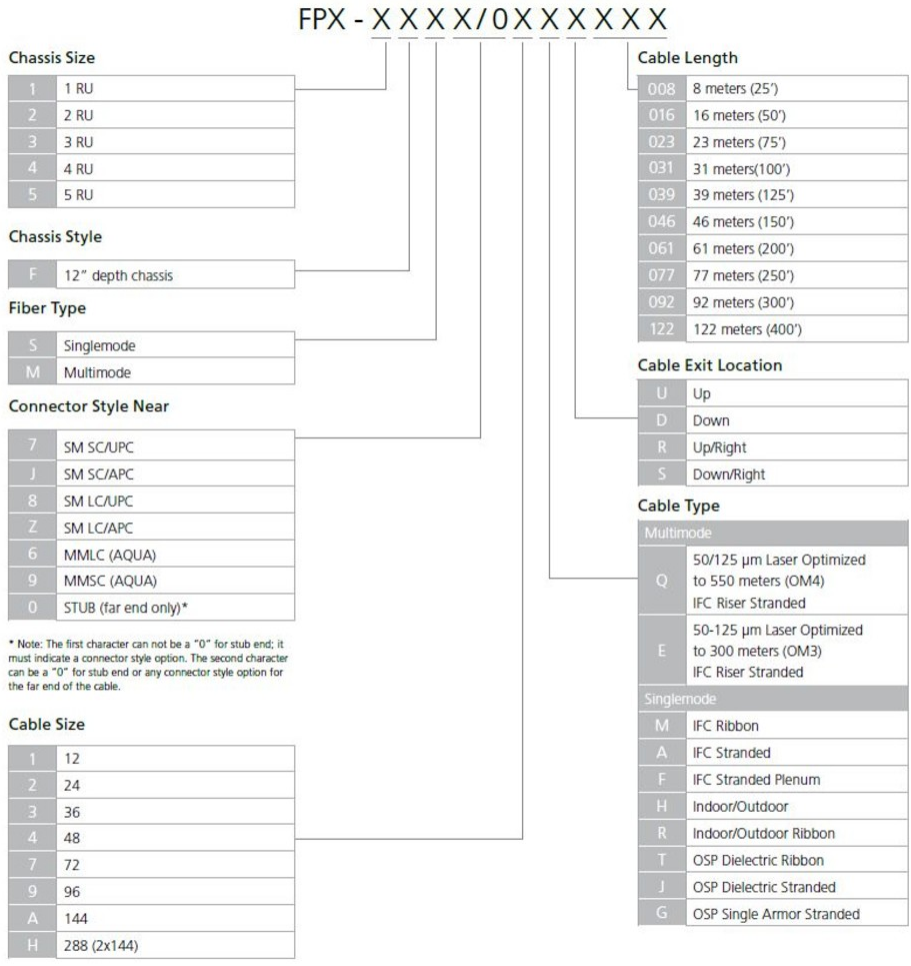

Material Specifications

Finish Powder coated

Material Type Steel

Optical Specifications

Fiber Mode Singlemode

Environmental Specifications

FPX-5FS7/0ARU152

Operating Temperature	-40 °C to +85 °C (-40 °F to +185 °F)
Storage Temperature	-40 °C to +85 °C (-40 °F to +185 °F)

Packaging and Weights

Packaging quantity	1
---------------------------	---

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant
UK-ROHS	Compliant

