


RRZZV4-65D-R8N43



16-port sector antenna, 4x 694-960, 4x 1427-2690, and 8x 1695-2690 MHz 65° HPBW, 8 x RET

- All Internal RET actuators are connected in “Cascaded SRET” configuration
- Retractable tilt indicator rods
- Antenna shape optimized for wind load reduction

General Specifications

Antenna Type	Sector
Band	Multiband
Grounding Type	RF connector inner conductor and body grounded to reflector and mounting bracket
Performance Note	Outdoor usage
RF Connector Interface	4.3-10 Female
RF Connector Location	Bottom
RF Connector Quantity, high band	0
RF Connector Quantity, mid band	12
RF Connector Quantity, low band	4
RF Connector Quantity, total	16

Remote Electrical Tilt (RET) Information

RET Hardware	CommRET v2
RET Interface	8-pin DIN Female 8-pin DIN Male
RET Interface, quantity	2 female 2 male
Input Voltage	10–30 Vdc
Internal RET	Low band (2) Mid band (6)
Power Consumption, active state, maximum	8 W
Power Consumption, idle state, maximum	1 W
Protocol	3GPP/AISG 2.0 (Single RET)

Dimensions

Width	430 mm 16.929 in
Depth	197 mm 7.756 in

RRZZV4-65D-R8N43


Length

2769 mm | 109.016 in


Net Weight, antenna only

44.6 kg | 98.326 lb

Array Layout

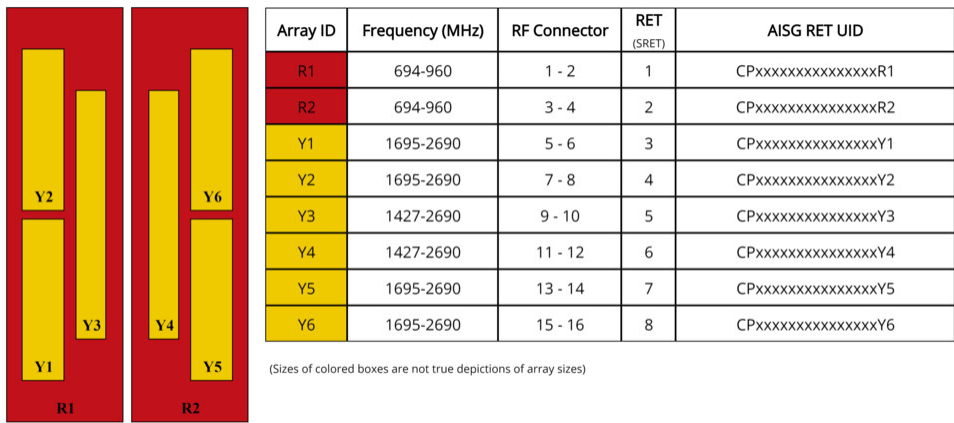

Port Configuration

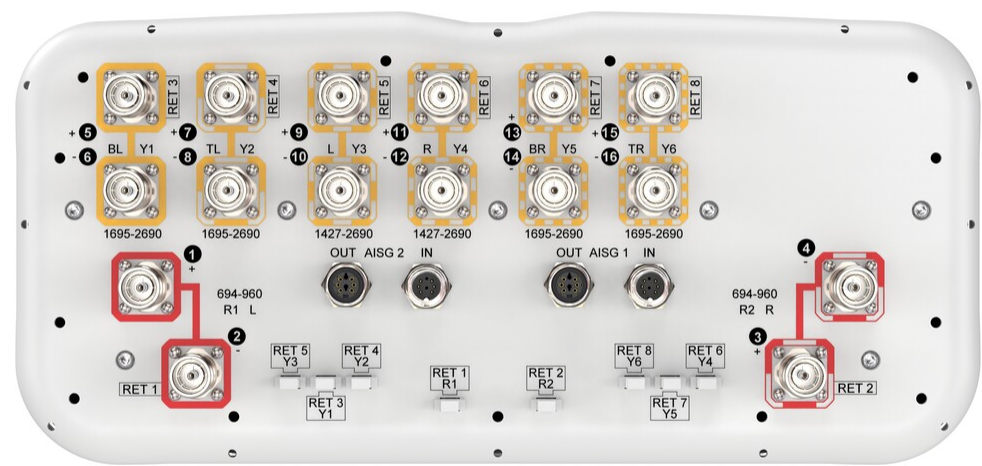

RRZZV4-65D-R8N43

Electrical Specifications

Impedance	50 ohm
Operating Frequency Band	1427 – 2690 MHz 1695 – 2690 MHz 694 – 960 MHz
Polarization	±45°
Total Input Power, maximum	1,200 W @ 50 °C

Electrical Specifications

	R1,R2	R1,R2	R1,R2	Y3,Y4	Y3,Y4	Y3,Y4	Y3,Y4	Y3,Y4
Frequency Band, MHz	698–806	790–894	890–960	1427–1518	1695–1995	1920–2300	2300–2500	2490–2690
RF Port	1-4	1-4	1-4	9-12	9-12	9-12	9-12	9-12
Gain at Mid Tilt, dBi	15.5	16.1	16.4	15.4	16.2	17.3	18.2	18.3
Beamwidth, Horizontal, degrees	61	55	53	64	68	68	61	58
Beamwidth, Vertical, degrees	7.7	6.9	6.4	6.9	5.7	5.1	4.5	4.3
Beam Tilt, degrees	2–12	2–12	2–12	2–12	2–12	2–12	2–12	2–12
USLS (First Lobe), dB	15	15	16	17	16	17	18	18
Front-to-Back Ratio at 180°, dB	35	35	32	32	32	32	32	33
Front-to-Back Total Power at 180° ± 30°, dB	23	23	23	24	26	26	27	27
CPR at Boresight, dB	24	22	21	18	17	17	18	15
Isolation, Cross Polarization, dB	27	27	27	26	26	26	26	26
Isolation, Inter-band, dB	27	27	27	26	26	26	26	26
VSWR Return loss, dB	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0
PIM, 3rd Order, 2 x 20 W, dBc	-153	-153	-153	-153	-153	-153	-153	-153
Input Power per Port at 50°C, maximum, watts	300	300	300	250	250	250	200	200

Electrical Specifications

	Y1,Y2,Y5,Y6	Y1,Y2,Y5,Y6	Y1,Y2,Y5,Y6	Y1,Y2,Y5,Y6
Frequency Band, MHz	1695–1995	1920–2300	2300–2500	2490–2690
RF Port	5-8,13-16	5-8,13-16	5-8,13-16	5-8,13-16
Gain at Mid Tilt, dBi	16.1	17.2	17.9	17.7
Beamwidth, Horizontal, degrees	69	64	62	61

RRZZV4-65D-R8N43

Beamwidth, Vertical, degrees	6.4	5.6	5	4.8
Beam Tilt, degrees	2-12	2-12	2-12	2-12
USLS (First Lobe), dB	15	15	16	17
Front-to-Back Ratio at 180°, dB	32	31	32	33
Front-to-Back Total Power at 180° ± 30°, dB	26	25	26	26
CPR at Boresight, dB	18	17	18	17
Isolation, Cross Polarization, dB	27	27	27	27
Isolation, Inter-band, dB	27	27	27	27
VSWR Return loss, dB	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0
PIM, 3rd Order, 2 x 20 W, dBc	-153	-153	-153	-153
Input Power per Port at 50°C, maximum, watts	250	250	200	200

Mechanical Specifications

Wind Loading @ Velocity, frontal	680.0 N @ 150 km/h (152.9 lbf @ 150 km/h)
Wind Loading @ Velocity, lateral	347.0 N @ 150 km/h (78.0 lbf @ 150 km/h)
Wind Loading @ Velocity, maximum	1,020.0 N @ 150 km/h (229.3 lbf @ 150 km/h)
Wind Loading @ Velocity, rear	434.0 N @ 150 km/h (97.6 lbf @ 150 km/h)
Wind Speed, maximum	241 km/h (150 mph)

Packaging and Weights

Width, packed	511 mm 20.118 in
Depth, packed	318 mm 12.52 in
Length, packed	2890 mm 113.78 in
Weight, gross	64.3 kg 141.757 lb

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant
UK-ROHS	Compliant

RRZZV4-65D-R8N43



Included Products

BSAMNT-4	–	Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.
BSAMNT-M4	–	Middle Downtilt Mounting Kit for Long Antennas for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor bracket set.

* Footnotes

Performance Note	Severe environmental conditions may degrade optimum performance
-------------------------	---