

Fiber indoor/outdoor cable, LazrSPEED®, Single Jacket/Single Armor, 120 min Fire Survival, LSZH) 96 fiber, Gel-Filled, Stranded Loose, Multimode OM3, Meters jacket marking, Black jacket color. Provides Rodent Resistance

- Corrugated steel tape armor is strong yet flexible, providing additional crush and rodent protection

## Product Classification

Regional Availability	Asia   Australia/New Zealand   EMEA
Portfolio	CommScope®
Product Type	Fiber indoor/outdoor cable
Product Series	C-LA


## General Specifications

Armor Type	Corrugated steel
Cable Type	Stranded loose tube
Construction Type	Armored
Subunit Type	Gel-filled
Jacket Color	Black
Jacket Marking	Meters
Jacket Marking Method	Inkjet
Jacket Marking Text	COMMScope GB F.O. CABLE 760249993 INT/EXT FIRE SURVIVAL 96 X 50 /125 OM3 (Serial NUMBER) (METRE MARK)
Subunit, quantity	8
Fibers per Subunit, quantity	12
Total Fiber Count	96

## Dimensions

Buffer Tube/Subunit Diameter	2.5 mm   0.098 in
Diameter Over Jacket	16 mm   0.63 in

## Representative Image

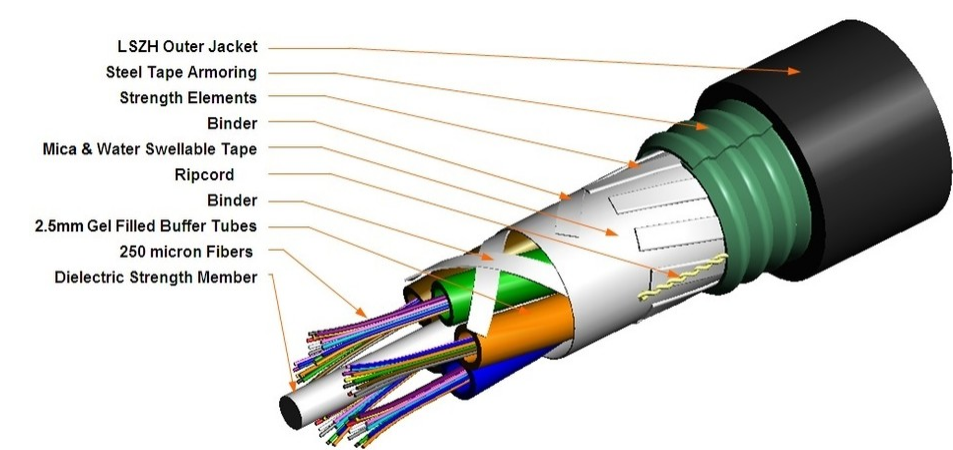

Mechanical Specifications

Minimum Bend Radius, loaded	330 mm   12.992 in
Minimum Bend Radius, unloaded	200 mm   7.874 in
Tensile Load, long term, maximum	2000 N   449.618 lbf
Tensile Load, short term, maximum	4000 N   899.236 lbf
Compression	20 N/mm   114.203 lb/in
Compression Test Method	IEC 60794-1 E3
Impact	5 N-m   44.254 in lb
Impact Test Method	IEC 60794-1 E4
Strain	See long and short term tensile loads
Strain Test Method	IEC 60794-1 E1
Twist	5 cycles
Twist Test Method	IEC 60794-1 E7

Optical Specifications

Fiber Type	OM3   OM3, LazrSPEED®
------------	-----------------------

Environmental Specifications

Operating Temperature	-30 °C to +70 °C (-22 °F to +158 °F)
Storage Temperature	-40 °C to +75 °C (-40 °F to +167 °F)
Cable Qualification Standards	EN 187105   IEC 60794-1-2

Environmental Space	Aerial, lashed   Buried   Low Smoke Zero Halogen (LSZH)
Flame Test Method	IEC 60331-25 (120) Fire resistance: 120 minutes at 750 °C (no fiber break)   IEC 60332-1   IEC 60332-3-24   IEC 60754-1   IEC 60754-2   IEC 61034-2   NES 713 (<=5 - jacket material only)
Jacket UV Resistance	UV stabilized
Water Penetration	24 h
Water Penetration Test Method	IEC 60794-1 F5

Environmental Test Specifications

Low High Bend Test Method	IEC 60794-1 E11
Temperature Cycle	-30 °C to +70 °C (-22 °F to +158 °F)
Temperature Cycle Test Method	IEC 60794-1 F1

Packaging and Weights

Cable weight	304 kg/km   204.279 lb/kft
--------------	----------------------------

Included Products

CS-5L-LT	-	LazrSPEED® 300 OM3 Bend-Insensitive Multimode Fiber
----------	---	---

\* Footnotes

Operating Temperature	Specification applicable to non-terminated bulk fiber cable
-----------------------	---

LazrSPEED® 300 OM3 Bend-Insensitive Multimode Fiber

LazrSPEED® 300

Product Classification

Portfolio	CommScope®
Product Type	Optical fiber

General Specifications

Cladding Diameter	125 µm
Cladding Diameter Tolerance	±5 µm
Cladding Non-Circularity, maximum	1 %
Coating Diameter (Colored)	254 µm
Coating Diameter (Uncolored)	245 µm
Coating Diameter Tolerance (Colored)	±7 µm
Coating Diameter Tolerance (Uncolored)	±10 µm
Coating/Cladding Concentricity Error, maximum	12 µm
Core Diameter	50 µm
Core Diameter Tolerance	±2.5 µm
Core/Clad Offset, maximum	1.5 µm
Proof Tensile Stress	100,000 psi (0.69 GPa)

Mechanical Specifications

Macrobending, 15 mm Ø mandrel, 2 turns	0.20 dB @ 850 nm   0.50 dB @ 1,300 nm
Macrobending, 30 mm Ø mandrel, 2 turns	0.10 dB @ 850 nm   0.30 dB @ 1,300 nm
Macrobending, 75 mm Ø mandrel, 100 turns	0.50 dB @ 1,300 nm   0.50 dB @ 850 nm
Coating Strip Force, maximum	8.9 N   2.001 lbf
Coating Strip Force, minimum	1.3 N   0.292 lbf
Dynamic Fatigue Parameter, minimum	18

Optical Specifications

Numerical Aperture	0.2
--------------------	-----

# CS-5L-LT

Numerical Aperture Tolerance	±0.015
Point Defects, maximum	0.15 dB
Zero Dispersion Slope, maximum	0.105 ps/[km-nm-nm]
Zero Dispersion Wavelength, maximum	1316 nm
Zero Dispersion Wavelength, minimum	1297 nm

## Optical Specifications, Wavelength Specific

1 Gbps Ethernet Distance	1,020 m @ 850 nm   600 m @ 1,300 nm
10 Gbps Ethernet Distance	300 m @ 850 nm
Attenuation, maximum	1.00 dB/km @ 1,300 nm   3.00 dB/km @ 850 nm
Backscatter Coefficient	-68.0 dB @ 850 nm   -75.7 dB @ 1,300 nm
Bandwidth, Laser, minimum	2,000 MHz-km @ 850 nm   500 MHz-km @ 1,300 nm
Bandwidth, OFL, minimum	1,500 MHz-km @ 850 nm   500 MHz-km @ 1,300 nm
Differential Mode Delay	0.70 ps/m @ 850 nm
Differential Mode Delay Note	Superior to ANSI/TIA TIA-492AAAF and IEC 60793-2-10 at 850 nm
Index of Refraction	1.479 @ 1,300 nm   1.483 @ 850 nm
Standards Compliance	ANSI/TIA-492AAAF (OM3)

## Environmental Specifications

Heat Aging, maximum	0.20 dB/km @ 85 °C
Temperature Dependence, maximum	0.1 dB/km
Temperature Humidity Cycling, maximum	0.2 dB/km
Water Immersion, maximum	0.20 dB/km @ 23 °C

## Regulatory Compliance/Certifications

Agency	Classification
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system

## \* Footnotes

Temperature Dependence, maximum	Temperature dependence is conducted at -60 °C to +85 °C (-76 °F to +185 °F)
Temperature Humidity Cycling, maximum	Temperature humidity cycling is conducted at -10 °C to +85 °C (+14 °F to +185 °F) up to 95% relative humidity