


# 760251608 | L-096-LN-5K-M12AQ/14D/GY/C



Fiber indoor cable, Single Jacket All-Dielectric, 96 fiber, Gel-Free, Stranded Microsheath Tube, Multimode OM4, Meters jacket marking, Aqua jacket color, Cca Flame rating. Provides Rodent Resistance

## Product Classification

Regional Availability	Asia   Australia/New Zealand   EMEA   Latin America
Portfolio	CommScope®
Product Type	Fiber indoor cable
Product Series	L-LN


## General Specifications

Cable Type	Stranded microsheath tube
Construction Type	Non-armored
Subunit Type	Gel-free
Jacket Color	Aqua
Jacket Marking	Meters
Jacket Marking Method	Inkjet
Jacket Marking Text	COMMScope GB OPTICAL CABLE 760251608 96x 50 /125 OM4 LSZH EN50575 CLASS C [SERIAL NUMBER] [METER MARK
Subunit, quantity	8
Fibers per Subunit, quantity	12
Total Fiber Count	96

## Dimensions

Buffer Tube/Subunit Diameter	1.4 mm   0.055 in
Diameter Over Jacket	8.4 mm   0.331 in

## Representative Image

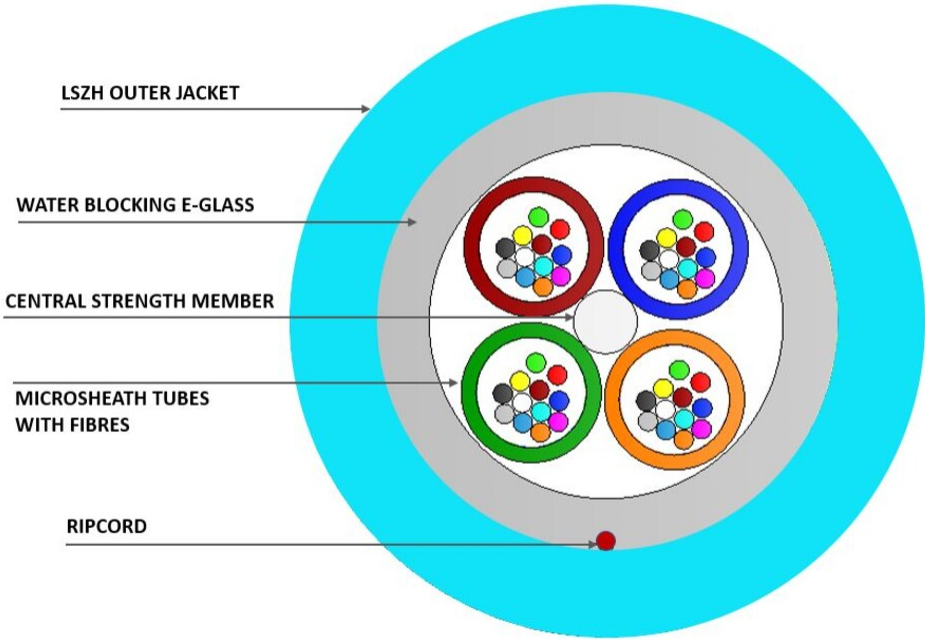

Material Specifications

Inner Jacket Material

Low Smoke Zero Halogen (LSZH)

Mechanical Specifications

Minimum Bend Radius, loaded	170 mm   6.693 in
Minimum Bend Radius, unloaded	120 mm   4.724 in
Tensile Load, long term, maximum	950 N   213.569 lbf
Tensile Load, short term, maximum	1600 N   359.694 lbf
Compression	10 N/mm   57.101 lb/in
Compression Test Method	FOTP-41   IEC 60794-1 E3
Impact	2 N-m   17.701 in lb
Impact Test Method	FOTP-25   IEC 60794-1 E4
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33   IEC 60794-1 E1
Vertical Rise, maximum	1100 m   3,608.924 ft

Optical Specifications

Fiber Type

OM4

### Environmental Specifications

Installation temperature	0 °C to +50 °C (+32 °F to +122 °F)
Operating Temperature	-10 °C to +60 °C (+14 °F to +140 °F)
Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Cable Qualification Standards	IEC 60794-1-2
EN50575 CPR Cable EuroClass Fire Performance	Cca
EN50575 CPR Cable EuroClass Smoke Rating	s1a
EN50575 CPR Cable EuroClass Droplets Rating	d0
EN50575 CPR Cable EuroClass Acidity Rating	a1
Environmental Space	Low Smoke Zero Halogen (LSZH)

### Environmental Test Specifications

Cable Freeze	-2 °C   28.4 °F
Cable Freeze Test Method	FOTP-98   IEC 60794-1 F15
Temperature Cycle	-10 °C to +60 °C (+14 °F to +140 °F)
Temperature Cycle Test Method	FOTP-3   IEC 60794-1 F1

### Packaging and Weights

Cable weight	80 kg/km   53.758 lb/kft
--------------	--------------------------

### Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
REACH-SVHC	Compliant as per SVHC revision on <a href="https://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a>
ROHS	Compliant
UK-ROHS	Compliant



### Included Products

CS-5K-LT	– LazrSPEED® 550 OM4 Bend-Insensitive Multimode Fiber
----------	---

### \* Footnotes

**Operating Temperature** Specification applicable to non-terminated bulk fiber cable

760251608 | L-096-LN-5K-M12AQ/14D/GY/C

---