


# NNH4S4-65B-R7



20-port sector antenna, 4x 698-896 and 8x 1695-2360 MHz, 65° HPBW, and 8 x 3400-4000 MHz, 90° HPBW, 7 x RET

- Multi-band FDD antenna featuring C-Band 8T8R functionality
- The C-band RET is factory set to AISG2. All other RET are assigned to AISG1
- Feature the same dimensions as existing 8 and 12-port FDD capable antennas
- New endcap designs provide improved wind loading performance

Alternative products available:

NNH4S4-65B-R4B-V1     20-port sector antenna, 4x 698-896 and 8x 1695-2360 MHz, 65° HPBW, and 8 x 3400-4000 MHz, 90° HPBW, 4 x RET

## General Specifications

Antenna Type	Sector and beamforming
Band	Multiband
Calibration Connector Interface	4.3-10 Female
Calibration Connector Quantity	1
Color	Light Gray (RAL 7035)
Grounding Type	RF connector inner conductor and body grounded to reflector and mounting bracket
Performance Note	Outdoor usage
Radome Material	Fiberglass, UV resistant
Reflector Material	Aluminum
RF Connector Interface	4.3-10 Female
RF Connector Location	Bottom
RF Connector Quantity, high band	8
RF Connector Quantity, mid band	8
RF Connector Quantity, low band	4
RF Connector Quantity, total	20

## Remote Electrical Tilt (RET) Information

RET Hardware	CommRET v2
RET Interface	8-pin DIN Female   8-pin DIN Male


# NNH4S4-65B-R7

RET Interface, quantity	2 female   2 male
Input Voltage	10–30 Vdc
Internal RET	High band (1)   Low band (2)   Mid band (4)
Power Consumption, active state, maximum	8 W
Power Consumption, idle state, maximum	1 W
Protocol	3GPP/AISG 2.0

## Dimensions


Width	498 mm   19.606 in
Depth	197 mm   7.756 in
Length	1848 mm   72.756 in
Net Weight, antenna only	41.3 kg   91.051 lb
TDD Column Spacing	41 mm   1.614 in

## Array Layout

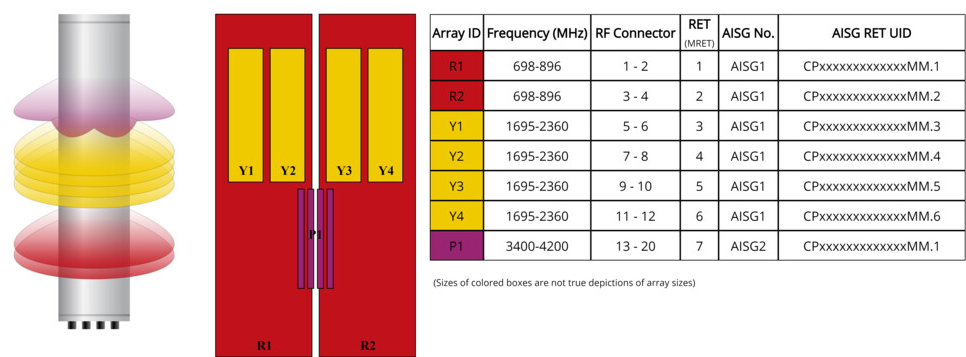

## Port Configuration

# NNH4S4-65B-R7

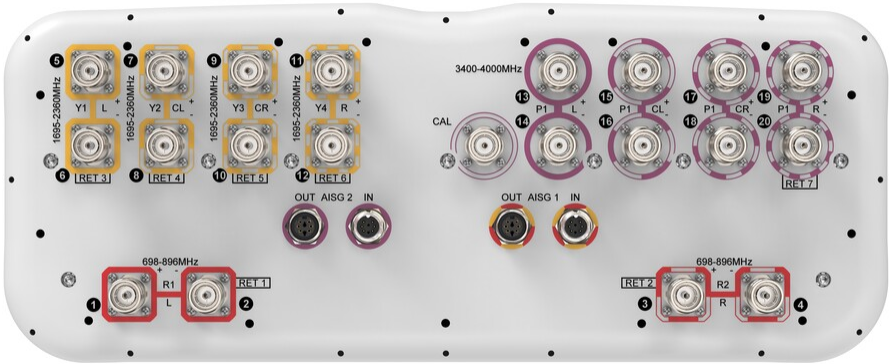

## Electrical Specifications

Impedance	50 ohm
Operating Frequency Band	1695 – 2360 MHz   3400 – 4000 MHz   698 – 896 MHz
Polarization	±45°
Total Input Power, maximum	1,500 W @ 50 °C

## Electrical Specifications

	R1,R2	R1,R2	Y1,Y2,Y3,Y4	Y1,Y2,Y3,Y4	Y1,Y2,Y3,Y4	Y1,Y2,Y3,Y4	P1	P1
Frequency Band, MHz	698–806	806–896	1695–1880	1850–1990	1920–2180	2300–2360	3400–3800	3700–4000
RF Port	1-4	1-4	5-12	5-12	5-12	5-12	13-20	13-20
Gain, dBi	14.1	15	15.6	16.2	16.6	16.8	16.1	16.3
Beamwidth, Horizontal, degrees	75	66	68	67	62	60	85	74
Beamwidth, Vertical, degrees	12.3	10.7	9.2	8.6	8.2	7.4	6	5.6
Beam Tilt, degrees	2–14	2–14	2–12	2–12	2–12	2–12	0–10	0–10
USLS (First Lobe), dB	18	17	16	17	16	18	16	15
Front-to-Back Ratio at 180°, dB	27	28	34	34	33	36	30	31
Coupling level, Amp, Antenna port to Cal port, dB							-26	-26
Coupling level, max Amp Δ, Antenna port to Cal port, dB							±2	±2
Coupler, max Amp Δ, Antenna port to Cal port, dB							0.6	0.6
Coupler, max Phase Δ,							5	5

# NNH4S4-65B-R7

Antenna port to Cal port, degrees								
CPR at Boresight, dB	18	21	19	20	21	22	15	15
Isolation, Cross Polarization, dB	25	25	25	25	25	25	25	25
Isolation, Inter-band, dB	25	25	25	25	25	25	25	25
Isolation, Co-polarization, dB							19	19
VSWR   Return loss, dB	1.5   14.0	1.5   14.0	1.5   14.0	1.5   14.0	1.5   14.0	1.5   14.0	1.5   14.0	1.5   14.0
PIM, 3rd Order, 2 x 20 W, dBc	-150	-150	-150	-150	-150	-150	-145	-145
Input Power per Port at 50°C, maximum, watts	300	300	250	250	250	200	75	75

## Electrical Specifications, Broadcast 65°

Frequency Band, MHz	3400–3800 3700–4000	
Gain, dBi	17.9	18.5
Beamwidth, Horizontal, degrees	65	65
Beamwidth, Vertical, degrees	5.9	5.6
Front-to-Back Total Power at 180° ± 30°, dB	26	27
USLS (First Lobe), dB	19	20

## Electrical Specifications, Envelope Pattern

Frequency Band, MHz	3400–3800 3700–4000	
Gain, dBi	21.1	21.3
Beamwidth, Horizontal at 10 dB, degrees	119	119
Front-to-Back Total Power at 180° ± 30°, dB	28	28
USLS (First Lobe), dB	22	22

## Electrical Specifications, Service Beam

Frequency Band, MHz	3400–3800 3700–4000	
Steered 0° Gain, dBi	21.1	21.1
Steered 0° Beamwidth, Horizontal, degrees	24	25
Steered 0° Front-to-Back Total Power at 180° ± 30°, dB	31	30
Steered 0° Horizontal	13	12

# NNH4S4-65B-R7

Sidelobe, dB		
Steered 30° Gain, dBi	19.7	20.3
Steered 30° Beamwidth, Horizontal, degrees	30	25
Steered 30° Front-to-Back Total Power at 180° ± 30°, dB	28	28

## Electrical Specifications, Soft Split

Frequency Band, MHz	3400–3800	3700–4000
Gain, dBi	19.7	20.1
Beamwidth, Horizontal, degrees	33	27
Front-to-Back Total Power at 180° ± 30°, dB	29	28
Horizontal Sidelobe, dB	15	15

## Mechanical Specifications

Effective Projective Area (EPA), frontal	0.59 m²   6.351 ft²
Effective Projective Area (EPA), lateral	0.18 m²   1.938 ft²
Wind Loading @ Velocity, frontal	629.0 N @ 150 km/h (141.4 lbf @ 150 km/h)
Wind Loading @ Velocity, lateral	191.0 N @ 150 km/h (42.9 lbf @ 150 km/h)
Wind Loading @ Velocity, maximum	755.0 N @ 150 km/h (169.7 lbf @ 150 km/h)
Wind Loading @ Velocity, rear	433.0 N @ 150 km/h (97.3 lbf @ 150 km/h)
Wind Speed, maximum	241.4 km/h (150 mph)

## Packaging and Weights

Width, packed	565 mm   22.244 in
Depth, packed	309 mm   12.165 in
Length, packed	2035 mm   80.118 in
Weight, gross	52.6 kg   115.963 lb

## Regulatory Compliance/Certifications

Agency	Classification
CE	Compliant with the relevant CE product directives
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.andrew.com/ProductCompliance">www.andrew.com/ProductCompliance</a>

# NNH4S4-65B-R7

---

ROHS

UK-ROHS

Compliant

Compliant



## Included Products

- BSAMNT-2F

–


Mounting bracket for cylindrical pipe installations (60-115mm pipe diameter) for fix mechanical tilt applications.

## \* Footnotes

Performance Note

Severe environmental conditions may degrade optimum performance

# BSAMNT-2F

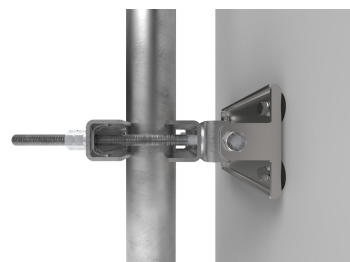

Mounting bracket for cylindrical pipe installations (60-115mm pipe diameter) for fix mechanical tilt applications.

## Product Classification

**Product Type** Fixed tilt mounting kit

## General Specifications

**Application** Outdoor

**Color** Silver

## Dimensions

**Compatible Diameter, maximum** 115 mm | 4.528 in

**Compatible Diameter, minimum** 60 mm | 2.362 in

**Weight, net** 3.8 kg | 8.378 lb

## Material Specifications

**Material Type** Galvanized steel

## Packaging and Weights

**Included** Brackets | Hardware

**Packaging quantity** 1

**Weight, gross** 4 kg | 8.818 lb

## Regulatory Compliance/Certifications

Agency	Classification
CE	Compliant with the relevant CE product directives
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.andrew.com/ProductCompliance">www.andrew.com/ProductCompliance</a>
ROHS	Compliant
UK-ROHS	Compliant

# BSAMNT-2F

---

