

Fiber indoor/outdoor drop cable, 24-fiber, ULSZH, loose tube, Singlemode G.652.D, gel-filled, Meters jacket marking, Black jacket color, Eca flame rating. Provides Rodent Resistance

## Product Classification

Regional Availability	Australia/New Zealand   EMEA
Portfolio	CommScope®
Product Type	Fiber indoor/outdoor cable
Product Series	C-CA


## General Specifications

Armor Type	Non-metallic rods
Cable Type	Loose tube
Construction Type	Armored
Subunit Type	Gel-filled
Jacket Color	Black
Jacket Marking	Meters
Jacket Marking Method	Inkjet
Jacket Marking Text	COMMScope GB OPTICAL CABLE 810009879/DB 24 x 9 /125 OS2 ULSZH EN50575 CLASS E [Serial NUMBER] [METRE MARK]
Subunit, quantity	1
Fibers per Subunit, quantity	24
Total Fiber Count	24

## Dimensions

Cable Length	2000 m   6,561.68 ft
Buffer Tube/Subunit Diameter	4 mm   0.157 in
Diameter Over Jacket	11 mm   0.433 in

## Representative Image

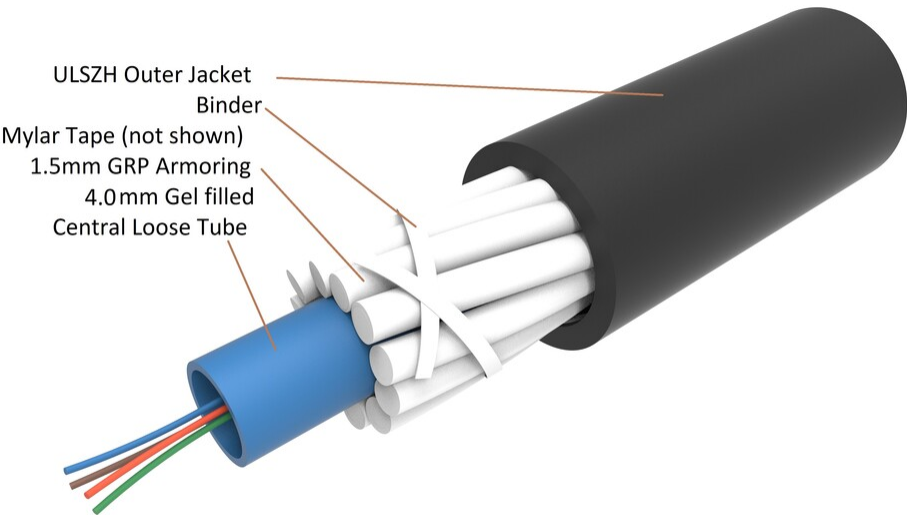

Mechanical Specifications

Minimum Bend Radius, loaded	320 mm   12.598 in
Minimum Bend Radius, unloaded	240 mm   9.449 in
Tensile Load, long term, maximum	750 N   168.607 lbf
Tensile Load, short term, maximum	3000 N   674.427 lbf
Cable Crush Resistance, maximum	30 N/mm   171.304 lb/in
Compression	30 N/mm   171.304 lb/in
Compression Test Method	IEC 60794-1-2 E3
Impact	5 N-m   44.254 in lb
Impact Test Method	IEC 60794-1 E4
Twist	5 cycles
Twist Test Method	IEC 60794-1 E7

Optical Specifications

Fiber Type	G.652.D
------------	---------

Environmental Specifications

Installation temperature	-20 °C to +70 °C (-4 °F to +158 °F)
Operating Temperature	-20 °C to +70 °C (-4 °F to +158 °F)

Storage Temperature	-20 °C to +70 °C (-4 °F to +158 °F)
EN50575 CPR Cable EuroClass Fire Performance	Eca
Environmental Space	Universal Low Smoke Zero Halogen (ULSZH)

Environmental Test Specifications

Temperature Cycle	-20 °C to +70 °C (-4 °F to +158 °F)
Temperature Cycle Test Method	IEC 60794-1-2 F1

Packaging and Weights

Cable weight	142 kg/km   95.42 lb/kft
--------------	--------------------------

Included Products

CS-8W-250-EMEA – LightScope® ZWP Singlemode Fiber  
8W-250um

\* Footnotes

**Operating Temperature** Specification applicable to non-terminated bulk fiber cable

LightScope® ZWP Singlemode Fiber



Product Classification

Portfolio	CommScope®
Product Type	Optical fiber

General Specifications

Cladding Diameter	125 µm
Cladding Diameter Tolerance	±0.7 µm
Cladding Non-Circularity, maximum	0.7 %
Coating Diameter (Colored)	249 µm
Coating Diameter (Uncolored)	242 µm
Coating Diameter Tolerance (Colored)	±13 µm
Coating Diameter Tolerance (Uncolored)	±7 µm
Coating/Cladding Concentricity Error, maximum	12 µm
Core/Clad Offset, maximum	0.5 µm
Proof Tensile Stress	100,000 psi (0.69 GPa)

Dimensions

Fiber Curl, minimum	4 m   13.123 ft
---------------------	-----------------

Mechanical Specifications

Macrobending, 20 mm Ø mandrel, 1 turn	0.75 dB @ 1,550 nm   1.50 dB @ 1,625 nm
Macrobending, 30 mm Ø mandrel, 10 turns	0.25 dB @ 1,550 nm   1.00 dB @ 1,625 nm
Macrobending, 60 mm Ø mandrel, 100 turns	0.05 dB @ 1,550 nm   0.05 dB @ 1,625 nm
Coating Strip Force, maximum	8.9 N   2.001 lbf
Coating Strip Force, minimum	1.3 N   0.292 lbf
Dynamic Fatigue Parameter, minimum	20

Optical Specifications

# CS-8W-250-EMEA | 8W-250um

Cabled Cutoff Wavelength, maximum	1250 nm
Point Defects, maximum	0.05 dB
Zero Dispersion Slope, maximum	0.092 ps/[km-nm-nm]
Zero Dispersion Wavelength, maximum	1324 nm
Zero Dispersion Wavelength, minimum	1300 nm

## Optical Specifications, Wavelength Specific

Attenuation, maximum	0.20 dB/km @ 1550 nm   0.23 dB/km @ 1,625 nm   0.344 dB/km @ 1310 nm   0.344 dB/km @ 1380 – 1385 nm
Dispersion, maximum	18 ps(nm-km) at 1550 nm   22 ps(nm-km) at 1625 nm   3.5 ps(nm-km) from 1285 nm to 1330 nm at 1310 nm
Index of Refraction	1.467 @ 1,310 nm   1.467 @ 1,385 nm   1.468 @ 1,550 nm
Mode Field Diameter	10.4 µm @ 1,550 nm   9.2 µm @ 1,310 nm
Mode Field Diameter Tolerance	±0.4 µm @ 1310 nm   ±0.5 µm @ 1550 nm
Polarization Mode Dispersion Link Design Value, maximum	0.05 ps/sqrt(km)
Standards Compliance	ITU-T G.652.D   ITU-T G.657.A1

## Environmental Specifications

Heat Aging, maximum	0.05 dB/km @ 85 °C
Temperature Dependence, maximum	0.05 dB/km
Temperature Humidity Cycling, maximum	0.05 dB/km
Water Immersion, maximum	0.05 dB/km @ 23 °C

## \* Footnotes

Temperature Dependence, maximum	Temperature dependence is conducted at -60 °C to +85 °C (-76 °F to +185 °F)
Temperature Humidity Cycling, maximum	Temperature humidity cycling is conducted at -10 °C to +85 °C (+14 °F to +185 °F) up to 95% relative humidity