NG4-VXLFA08AAN



NG4 Module, CEx 1, 8 circuits, LC/APC connectors

 *Product complies with the Build America, Buy America Act (BABAA) requirements of the Infrastructure Investment and Jobs Act of 2021 (Pub. L. 117- 58, §§ 70901-70953), or is the subject of a waiver approved by the Secretary of Commerce or designee. Compliance requirements and waiver applicability vary based on government funding program. Check the laws and regulations for your specific program.

Product Classification

Regional Availability

Asia | Australia/New Zealand | China | EMEA | India | Latin

America | North America

Product TypeCoexistence Element (CEx)

Product Series NG4

Government Requirements Build America Buy America (BABA) compliant*

General Specifications

Circuits, quantity 8

 Interface, Input
 LC/APC

 Interface, Output
 LC/APC

Location of ManufacturingWaived per BABA waiver for BEAD Program


Port Configuration



NG4-VXLFA08AAN

Module Type	Networks/Services	Wavelengths (nm)
CEx 1	GPON/25G	1290 - 1500
	UPG	1260-1280 & 1525-1650
CEx 2	GPON/25G	1290 - 1500
	XGS-PON	1260 - 1280; 1575 - 1581
	UPG	1525-1560 & 1596-1650
CEx 3	GPON/25G	1290 - 1500
	RF	1550 - 1560
	UPG	1260-1280 & 1525-1540 & 1575-1650
CEx 4	GPON/25G	1290 – 1500
	XGS-PON	1260 - 1280 & 1575 – 1581
	NG-PON2	1524-1544 & 1596-1603
	UPG	1550-1560 & 1613-1650
CEx 5	PON (COMBI)	1260-1500nm & 1575-1581nm
	UPG	1525-1565nm & 1596-1650nm

Block Diagram

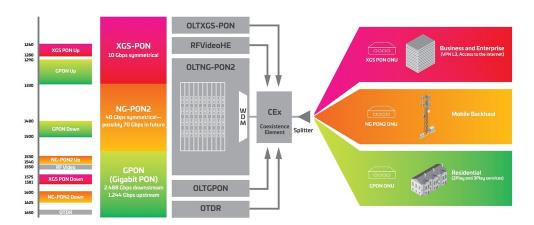

Optical Specifications

Directivity, minimum 50 dB

Input Power, maximum 200 mW

Passband GPON: 1290-1500 nm | UPG: 1260-1280 nm & 1525-1650 nm

Polarization Dependent Loss, maximum0.3 dBPolarization Mode Dispersion, maximum0.5 ps

Insertion Loss, including connectors COM to GPON: ≤ 0.8 dB | COM to UPG: ≤ 0.6 dB



NG4-VXLFA08AAN

Isolation COM to GPON: ≥ 30 dB | COM to UPG: ≥ 15 dB

Return Loss, minimum 50 dB

Environmental Specifications

Operating Temperature $-10 \,^{\circ}\text{C}$ to $+65 \,^{\circ}\text{C}$ ($+14 \,^{\circ}\text{F}$ to $+149 \,^{\circ}\text{F}$)

Relative Humidity 5%–95%, non-condensing

Qualification Standards Telcordia GR-63

Packaging and Weights

Packaging quantity

Regulatory Compliance/Certifications

Agency Classification

CHINA-ROHS Above maximum concentration value

ROHS Compliant/Exempted UK-ROHS Compliant/Exempted

