

# T4S4-90A-R2-V4



16-port Planar Array Antenna, 8x 2300–2690 and 8x 3300–3800MHz, 90° HPBW, 2x RET

- For use in beamforming systems includes one calibration port per band
- 2x MQ4 and 2x MQ5 cluster connectors (comprising 16 RF ports + 2 calibration ports in total) are provided for the beam-forming arrays

## General Specifications

Antenna Type	Sector and beamforming
Band	Multiband
Calibration Connector Interface	MQ5
Calibration Connector Quantity	2
Color	Light Gray (RAL 7035)
Grounding Type	RF connector inner conductor and body grounded to reflector and mounting bracket
Performance Note	Outdoor usage
Radome Material	Fiberglass, UV resistant
Reflector Material	Aluminum
RF Connector Interface	MQ4   MQ5
RF Connector Location	Bottom
RF Connector Quantity, high band	8
RF Connector Quantity, mid band	8
RF Connector Quantity, low band	0
RF Connector Quantity, total	16

## Remote Electrical Tilt (RET) Information

RET Hardware	CommRET v2
RET Interface	8-pin DIN Female   8-pin DIN Male
RET Interface, quantity	1 female   1 male
Input Voltage	10–30 Vdc
Internal RET	High band (1)   Mid band (1)
Power Consumption, active state, maximum	8 W
Power Consumption, idle state, maximum	1 W

# T4S4-90A-R2-V4

Protocol

3GPP/AISG 2.0 (Single RET)

## Dimensions

Width

498 mm | 19.606 in

Depth

197 mm | 7.756 in


Length

1499 mm | 59.016 in

Net Weight, antenna only

33 kg | 72.752 lb

## Array Layout

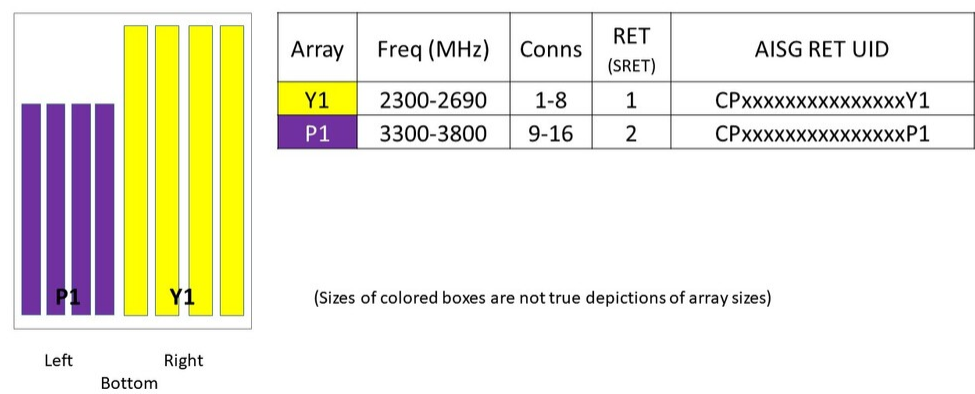

## Port Configuration

# T4S4-90A-R2-V4



## Electrical Specifications

Impedance	50 ohm
Operating Frequency Band	2300 – 2690 MHz   3300 – 3800 MHz
Polarization	±45°
Total Input Power, maximum	900 W @ 50 °C

## Electrical Specifications

	Y1	Y1	P1	P1
Frequency Band, MHz	2300–2500	2500–2690	3300–3600	3600–3800
RF Port	1-8	1-8	9-16	9-16
Gain at Mid Tilt, dBi	16.5	16.5	15.7	16.1
Beamwidth, Horizontal, degrees	103	97	99	92
Beamwidth, Vertical, degrees	5.2	5	6.7	6.3
Beam Tilt, degrees	2–12	2–12	2–12	2–12
USLS (First Lobe), dB	18	20	15	14
Front-to-Back Ratio at 180°, dB	35	35	30	29
Coupling level, Amp, Antenna port to Cal port, dB	26	26	26	26
Coupling level, max Amp Δ, Antenna port to Cal port, dB	±2	±2	±2	±2
Coupler, max Amp Δ, Antenna port to Cal port, dB	0.9	0.9	0.9	0.9

# T4S4-90A-R2-V4

Coupler, max Phase $\Delta$ , Antenna port to Cal port, degrees	7	7	7	7
Isolation, Cross Polarization, dB	25	25	25	25
Isolation, Inter-band, dB	30	30	30	30
Isolation, Co-polarization, dB	18	18	19	19
VSWR   Return loss, dB	1.5   14.0	1.5   14.0	1.5   14.0	1.5   14.0
PIM, 3rd Order, 2 x 20 W, dBc	-130	-130	-130	-130
Input Power per Port at 50°C, maximum, watts	150	150	75	75

## Electrical Specifications, Broadcast 65°

Frequency Band, MHz	2300–2500	2500–2690	3300–3600	3600–3800
Gain, dBi	17.9	17.9	16.2	16.3
Beamwidth, Horizontal, degrees	63	62	67	65
Beamwidth, Vertical, degrees	5.2	4.9	6.7	6.3
Front-to-Back Total Power at 180° $\pm$ 30°, dB	27	26	23	22
USLS (First Lobe), dB	18	20	16	16

## Electrical Specifications, Service Beam

Frequency Band, MHz	2300–2500	2500–2690	3300–3600	3600–3800
Steered 0° Gain, dBi	21.6	21.8	20.6	20.8
Steered 0° Beamwidth, Horizontal, degrees	27	25	25	23
Steered 0° Front-to-Back Total Power at 180° $\pm$ 30°, dB	31	31	28	28
Steered 0° Horizontal Sidelobe, dB	12	11	12	12
Steered 0° USLS (First Lobe), dB	20	22	16	15
Steered 30° Gain, dBi	21.2	21.2	19.8	19.9
Steered 30° Beamwidth, Horizontal, degrees	29	27	29	27
Steered 30° Front-to-Back Total Power at 180° $\pm$ 30°, dB	30	30	24	25

## Electrical Specifications, Soft Split

Frequency Band, MHz	2300–2500	2500–2690	3300–3600	3600–3800
Gain, dBi	21.1	21.1	19.7	19.9
Beamwidth, Horizontal, degrees	32	31	32	30

# T4S4-90A-R2-V4

Front-to-Back Total Power at 180° ± 30°, dB	30	29	26	27
Horizontal Sidelobe, dB	18	17	18	17
USLS (First Lobe), dB	16	17	16	16

## Mechanical Specifications

Wind Loading @ Velocity, frontal	498.0 N @ 150 km/h (112.0 lbf @ 150 km/h)
Wind Loading @ Velocity, lateral	148.0 N @ 150 km/h (33.3 lbf @ 150 km/h)
Wind Loading @ Velocity, maximum	597.0 N @ 150 km/h (134.2 lbf @ 150 km/h)
Wind Loading @ Velocity, rear	342.0 N @ 150 km/h (76.9 lbf @ 150 km/h)
Wind Speed, maximum	241 km/h (150 mph)

## Packaging and Weights

Width, packed	565 mm   22.244 in
Depth, packed	309 mm   12.165 in
Length, packed	1686 mm   66.378 in
Weight, gross	45.7 kg   100.751 lb

## Regulatory Compliance/Certifications

Agency	Classification
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system

## Included Products

BSAMNT-3	–	Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.
----------	---	--

## \* Footnotes

Performance Note	Severe environmental conditions may degrade optimum performance
------------------	---

# BSAMNT-3



Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.

## Product Classification

**Product Type** Downtilt mounting kit

## General Specifications

**Application** Outdoor

**Color** Silver

## Dimensions

**Compatible Diameter, maximum** 115 mm | 4.528 in

**Compatible Diameter, minimum** 60 mm | 2.362 in

**Weight, net** 6.2 kg | 13.669 lb

## Material Specifications

**Material Type** Galvanized steel

## Packaging and Weights

**Included** Brackets | Hardware

**Packaging quantity** 1

**Weight, gross** 6.4 kg | 14.11 lb

## Regulatory Compliance/Certifications

Agency	Classification
CE	Compliant with the relevant CE product directives
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.andrew.com/ProductCompliance">www.andrew.com/ProductCompliance</a>
ROHS	Compliant
UK-ROHS	Compliant

