

Fiber indoor cable, Plenum Distribution, 24 fiber single-unit, Singlemode G.657.A1, Meters jacket marking, Yellow jacket color

Product Classification

Regional Availability	Asia Australia/New Zealand
Portfolio	CommScope®
Product Type	Fiber indoor cable
Product Series	P-DS


General Specifications

Cable Type	Distribution
Construction Type	Non-armored
Subunit Type	Gel-free
Jacket Color	Yellow
Jacket Marking	Meters
Total Fiber Count	24

Dimensions

Diameter Over Jacket	8.5 mm 0.335 in
----------------------	-------------------

Representative Image

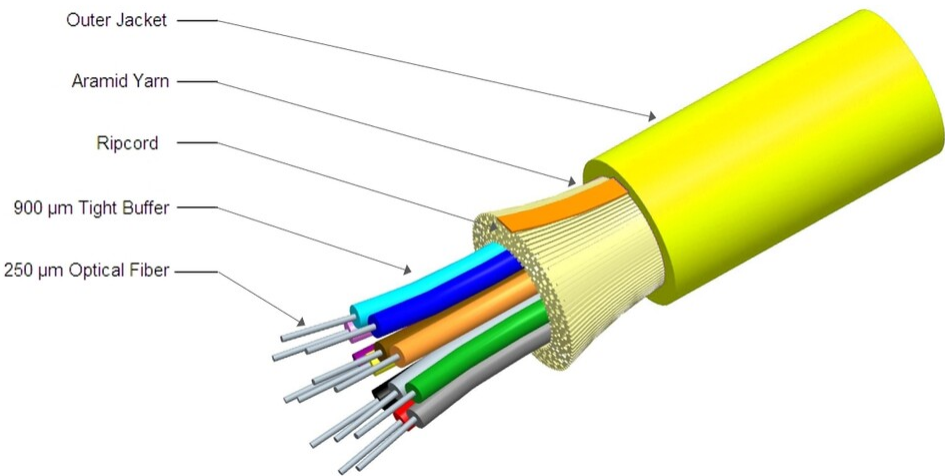

Mechanical Specifications

Minimum Bend Radius, loaded	176 mm 6.929 in
Tensile Load, long term, maximum	400 N 89.924 lbf
Tensile Load, short term, maximum	1335 N 300.12 lbf
Compression	10 N/mm 57.101 lb/in
Compression Test Method	IEC 60794-1-21 E3
Strain	See long and short term tensile loads
Strain Test Method	IEC 60794-1-21 E1

Optical Specifications

Fiber Type	G.657.A1
------------	----------

Optical Specifications, Wavelength Specific

Attenuation, maximum	0.30 dB/km @ 1,550 nm 0.4 dB/km @ 1,310 nm
----------------------	--

Environmental Specifications

Installation temperature	0 °C to +60 °C (-32 °F to +140 °F)
Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Environmental Space	Plenum
Flame Test Listing	NEC OFNP (UL) and c(UL)
Flame Test Method	NFPA 262

Environmental Test Specifications

Temperature Cycle Test Method IEC 60794-1-22 F1

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant
UK-ROHS	Compliant



Included Products

CS-8Z-TB-0.40/0.30/093 – Low Water Peak, Dispersion-Unshifted Singlemode Fiber