



Fiber Indoor/Outdoor cable, LazrSPEED®, 120 min Fire Survival, Low Smoke Zero Halogen (LSZH), 6 fiber, Gel-Filled, Central Loose Tube Cable, Multimode OM4, Feet jacket marking, Black jacket color. Provides Rodent Resistance.

Product Classification

|                       |                                     |
|-----------------------|-------------------------------------|
| Regional Availability | Asia   Australia/New Zealand   EMEA |
| Portfolio             | CommScope®                          |
| Product Type          | Fiber indoor/outdoor cable          |
| Product Series        | C-L2                                |


General Specifications

|                              |  |
|------------------------------|--|
| Armor Type                   | Corrugated steel   |
| Cable Type                   | Central loose tube   |
| Construction Type            | Armored  |
| Subunit Type                 | Gel-filled   |
| Jacket Color                 | Black  |
| Jacket Marking               | Meters   |
| Jacket Marking Method        | Inkjet   |
| Jacket Marking Text          | COMMScope GB SYSTEM F.O. CABLE X-1716218-2 INT/EXT FIRE SURVIVAL 6X50/125 OM4 [Serial number] [metre mark] |
| Subunit, quantity            | 1  |
| Fibers per Subunit, quantity | 6  |
| Total Fiber Count            | 6  |

Dimensions

|                              |                  |
|------------------------------|------------------|
| Buffer Tube/Subunit Diameter | 4 mm   0.157 in  |
| Diameter Over Jacket         | 12.7 mm   0.5 in |

Representative Image

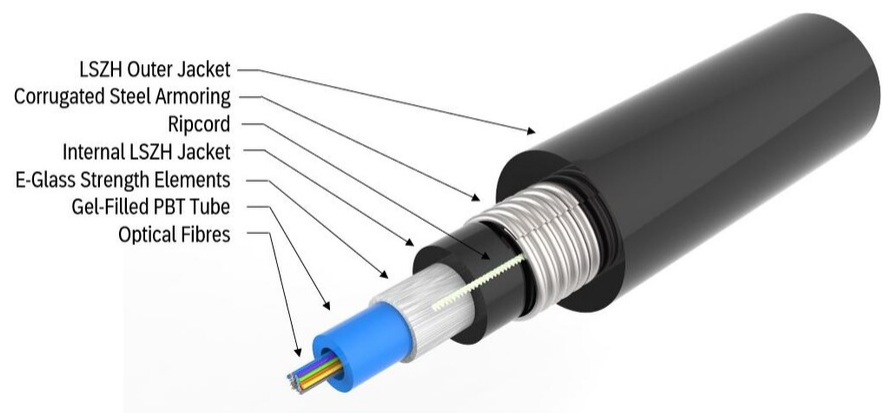

Mechanical Specifications

|                                   |                                       |
|-----------------------------------|---------------------------------------|
| Minimum Bend Radius, loaded       | 330 mm   12.992 in                    |
| Minimum Bend Radius, unloaded     | 255 mm   10.039 in                    |
| Tensile Load, long term, maximum  | 400 N   89.924 lbf                    |
| Tensile Load, short term, maximum | 1400 N   314.733 lbf                  |
| Compression                       | 30 N/mm   171.304 lb/in               |
| Compression Test Method           | IEC 60794-1 E3                        |
| Impact                            | 10 N-m   88.507 in lb                 |
| Impact Test Method                | IEC 60794-1 E4                        |
| Strain                            | See long and short term tensile loads |
| Strain Test Method                | IEC 60794-1 E1                        |
| Twist                             | 5 cycles                              |
| Twist Test Method                 | IEC 60794-1 E7                        |

Optical Specifications

|            |                       |
|------------|-----------------------|
| Fiber Type | OM4   OM4, LazrSPEED® |
|------------|-----------------------|

Environmental Specifications

|                       |                                     |
|-----------------------|-------------------------------------|
| Operating Temperature | -20 °C to +70 °C (-4 °F to +158 °F) |
|-----------------------|-------------------------------------|

# 2-1716218-2 | C-006-L2-5K-M06BK/40G/GY/FS/B

|  |   |
|--|---|
| Storage Temperature                          | -40 °C to +70 °C (-40 °F to +158 °F)  |
| Cable Qualification Standards                | EN 187105   IEC 60794-1-2   |
| EN50575 CPR Cable EuroClass Fire Performance | B2ca  |
| EN50575 CPR Cable EuroClass Smoke Rating     | s1b   |
| EN50575 CPR Cable EuroClass Droplets Rating  | d0  |
| EN50575 CPR Cable EuroClass Acidity Rating   | a1  |
| Environmental Space                          | Aerial, lashed   Buried   Low Smoke Zero Halogen (LSZH)   |
| Flame Test Listing                           | EN 50399   IEC 60332-1-2  |
| Flame Test Method                            | IEC 60331-25 (120) Fire resistance: 120 minutes at 750 °C (no fiber break)   IEC 60332-1   IEC 60754-1   IEC 60754-2   IEC 61034-2   NES 713 (<=5 - jacket material only) |
| Jacket UV Resistance                         | UV stabilized   |
| Water Penetration                            | 24 h  |
| Water Penetration Test Method                | IEC 60794-1 F5  |

## Environmental Test Specifications

|                               |                                     |
|-------------------------------|-------------------------------------|
| Low High Bend Test Method     | IEC 60794-1 E11                     |
| Temperature Cycle             | -20 °C to +70 °C (-4 °F to +158 °F) |
| Temperature Cycle Test Method | IEC 60794-1 F1                      |

## Packaging and Weights

|              |                            |
|--------------|----------------------------|
| Cable weight | 216 kg/km   145.145 lb/kft |
|--------------|----------------------------|

## Regulatory Compliance/Certifications

| Agency     | Classification  |
|------------|---|
| CHINA-ROHS | Below maximum concentration value   |
| REACH-SVHC | Compliant as per SVHC revision on <a href="https://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a> |
| ROHS       | Compliant   |
| UK-ROHS    | Compliant   |



## Included Products

|          |   |
|----------|---|
| CS-5K-LT | – LazrSPEED® 550 OM4 Bend-Insensitive Multimode Fiber |
|----------|---|

## \* Footnotes

**Operating Temperature** Specification applicable to non-terminated bulk fiber cable

## LazrSPEED® 550 OM4 Bend-Insensitive Multimode Fiber

### LazrSPEED® 550

#### Product Classification

|              |               |
|--------------|---------------|
| Portfolio    | CommScope®    |
| Product Type | Optical fiber |

#### General Specifications

|   |                            |
|---|----------------------------|
| Cladding Diameter                             | 125 µm                     |
| Cladding Diameter Tolerance                   | ±0.8 µm                    |
| Cladding Non-Circularity, maximum             | 1 %                        |
| Coating Diameter (Colored)                    | 254 µm                     |
| Coating Diameter (Uncolored)                  | 245 µm                     |
| Coating Diameter Tolerance (Colored)          | ±7 µm                      |
| Coating Diameter Tolerance (Uncolored)        | ±10 µm                     |
| Coating/Cladding Concentricity Error, maximum | 12 µm                      |
| Core Diameter                                 | 50 µm                      |
| Core Diameter Tolerance                       | ±2.5 µm                    |
| Core/Clad Offset, maximum                     | 1.5 µm                     |
| Proof Test                                    | 689.476 N/mm²   100000 psi |

#### Mechanical Specifications

|  |                                       |
|--|---------------------------------------|
| Macrobending, 15 mm Ø mandrel, 2 turns   | 0.20 dB @ 850 nm   0.50 dB @ 1,300 nm |
| Macrobending, 30 mm Ø mandrel, 2 turns   | 0.10 dB @ 850 nm   0.30 dB @ 1,300 nm |
| Macrobending, 75 mm Ø mandrel, 100 turns | 0.50 dB @ 1,300 nm   0.50 dB @ 850 nm |
| Coating Strip Force, maximum             | 8.9 N   2.001 lbf                     |
| Coating Strip Force, minimum             | 1.3 N   0.292 lbf                     |
| Dynamic Fatigue Parameter, minimum       | 18                                    |

# CS-5K-LT

## Optical Specifications

|                                     |                     |
|-------------------------------------|---------------------|
| Numerical Aperture                  | 0.2                 |
| Numerical Aperture Tolerance        | ±0.015              |
| Point Defects, maximum              | 0.15 dB             |
| Zero Dispersion Slope, maximum      | 0.105 ps/[km-nm-nm] |
| Zero Dispersion Wavelength, maximum | 1316 nm             |
| Zero Dispersion Wavelength, minimum | 1297 nm             |

## Optical Specifications, Wavelength Specific

|                              |   |
|------------------------------|---|
| 1 Gbps Ethernet Distance     | 1,110 m @ 850 nm   600 m @ 1,300 nm                           |
| 10 Gbps Ethernet Distance    | 550 m @ 850 nm  |
| Attenuation, maximum         | 1.00 dB/km @ 1,300 nm   3.00 dB/km @ 850 nm                   |
| Backscatter Coefficient      | -68.0 dB @ 850 nm   -75.7 dB @ 1,300 nm                       |
| Bandwidth, Laser, minimum    | 4,700 MHz-km @ 850 nm   500 MHz-km @ 1,300 nm                 |
| Bandwidth, OFL, minimum      | 3,500 MHz-km @ 850 nm   500 MHz-km @ 1,300 nm                 |
| Differential Mode Delay      | 0.70 ps/m @ 850 nm  |
| Differential Mode Delay Note | Superior to ANSI/TIA TIA-492AAAF and IEC 60793-2-10 at 850 nm |
| Index of Refraction          | 1.479 @ 1,300 nm   1.483 @ 850 nm                             |
| Standards Compliance         | ANSI/TIA-492AAAF (OM4)   IEC 60793-2-10, A1 (OM4)             |

## Environmental Specifications

|                                       |                    |
|---------------------------------------|--------------------|
| Heat Aging, maximum                   | 0.20 dB/km @ 85 °C |
| Temperature Dependence, maximum       | 0.1 dB/km          |
| Temperature Humidity Cycling, maximum | 0.2 dB/km          |
| Water Immersion, maximum              | 0.20 dB/km @ 23 °C |

## Regulatory Compliance/Certifications

| Agency        | Classification   |
|---------------|--|
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |

## \* Footnotes

|                                       |   |
|---------------------------------------|---|
| Temperature Dependence, maximum       | Temperature dependence is conducted at -60 °C to +85 °C (-76 °F to +185 °F)       |
| Temperature Humidity Cycling, maximum | Temperature humidity cycling is conducted at -10 °C to +85 °C (+14 °F to +185 °F) |

# CS-5K-LT

---

up to 95% relative humidity