

Fiber OSP cable, Multimode, Triple Jacket, Anti Termite, All-Dielectric Gel-filled, Mini Stranded Loose Tube, 48 fiber, Multimode OM4, Meters jacket marking, Black jacket color

Product Classification

Regional Availability	Asia   Australia/New Zealand
Portfolio	CommScope®
Product Type	Fiber OSP cable
Product Series	O-N3


General Specifications

Cable Type	Stranded loose tube
Subunit Type	Gel-filled
Filler, quantity	2
Jacket Color	Black
Jacket Marking	Meters
Subunit, quantity	4
Fibers per Subunit, quantity	12
Total Fiber Count	48

Dimensions

Buffer Tube/Subunit Diameter	1.55 mm   0.061 in
Diameter Over Jacket	7.3 mm   0.287 in

Representative Image

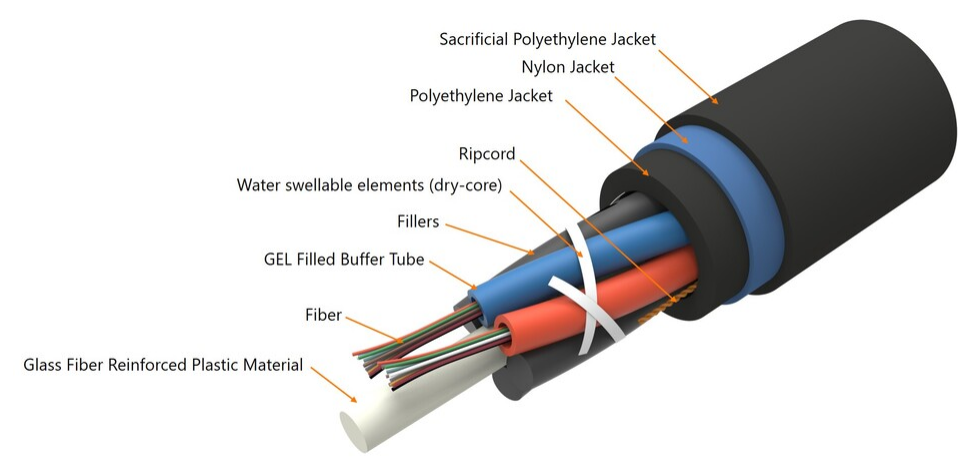

## Material Specifications

Jacket Material

Alternative jacket PE | Nylon | PE

## Mechanical Specifications

Minimum Bend Radius, loaded	150 mm   5.906 in
Minimum Bend Radius, unloaded	75 mm   2.953 in
Tensile Load, long term, maximum	1000 N   224.809 lbf
Compression	20 N/mm   114.203 lb/in
Compression Test Method	IEC 60794-1 E3
Flex	25 cycles
Impact	1 N-m   8.851 in lb
Impact Test Method	IEC 60794-1 E4
Strain	See long and short term tensile loads
Strain Test Method	IEC 60794-1 E1
Twist	10 cycles
Twist Test Method	IEC 60794-1-21 E7

## Optical Specifications

Fiber Type

OM4

## Optical Specifications, Wavelength Specific

Attenuation, maximum

0.70 dB/km @ 1,300 nm | 2.50 dB/km @ 850 nm

### Environmental Specifications

Installation temperature	0 °C to +50 °C (+32 °F to +122 °F)
Operating Temperature	-10 °C to +70 °C (+14 °F to +158 °F)
Storage Temperature	-20 °C to +70 °C (-4 °F to +158 °F)
Cable Qualification Standards	IEC 60794-5-10
Jacket UV Resistance	UV stabilized
Water Penetration	24 h
Water Penetration Test Method	IEC 60794-1 F5

### Environmental Test Specifications

Heat Age	0 °C to +85 °C (+32 °F to +185 °F)
Heat Age Test Method	IEC 60794-1 F9
Low High Bend Test Method	IEC 60794-1 E11
Temperature Cycle Test Method	IEC 60794-1 F1

### Packaging and Weights

Cable weight	43 kg/km   28.895 lb/kft
--------------	--------------------------

### Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
REACH-SVHC	Compliant as per SVHC revision on <a href="https://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a>
ROHS	Compliant
UK-ROHS	Compliant



### \* Footnotes

**Operating Temperature** Specification applicable to non-terminated bulk fiber cable