


RRV4-65B-R6-PS

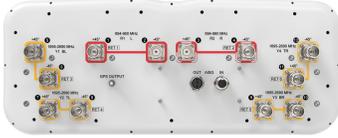

12-port sector antenna, 4x 698–960 and 8x 1695–2690 MHz, 65° HPBW, 6x IntRET. Bands cascaded SRET.

- All Internal RET actuators are connected in “Cascaded SRET” configuration
- New aerodynamic endcaps for wind load optimization
- Integrated Antenna Orientation and Location Sensing System APS-XT-GPS
- GPS timing synchronization output for RRH via SMA (f)

This product will be discontinued on: December 31, 2025

General Specifications

| | |
|---|---|
| Antenna Type | Sector |
| Band | Multiband |
| Color | Light Gray (RAL 7035) |
| Grounding Type | RF connector inner conductor and body grounded to reflector and mounting bracket |
| Performance Note | Outdoor usage Wind loading figures are validated by wind tunnel measurements described in EN1991-1-4 standard |
| Radome Material | Fiberglass, UV resistant |
| Reflector Material | Aluminum |
| RF Connector Interface | 4.3-10 Female |
| RF Connector Location | Bottom |
| RF Connector Quantity, high band | 0 |
| RF Connector Quantity, mid band | 8 |
| RF Connector Quantity, low band | 4 |
| RF Connector Quantity, total | 12 |

Remote Electrical Tilt (RET) Information

| | |
|--------------------------------|-----------------------------------|
| RET Hardware | CommRET v2 |
| RET Interface | 8-pin DIN Female 8-pin DIN Male |
| RET Interface, quantity | 1 female 1 male |
| Input Voltage | 10–30 Vdc |
| Internal RET | Low band (2) Mid band (4) |


RRV4-65B-R6-PS

| | |
|---|----------------------------|
| Power Consumption, active state, maximum | 8 W |
| Power Consumption, idle state, maximum | 1 W |
| Protocol | 3GPP/AISG 2.0 (Single RET) |

Dimensions

| | |
|---------------------------------|---------------------|
| Width | 498 mm 19.606 in |
| Depth | 197 mm 7.756 in |
| Length | 1859 mm 73.189 in |
| Net Weight, antenna only | 37.2 kg 82.012 lb |

Array Layout

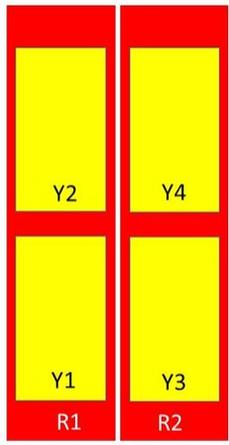


| Array | Freq (MHz) | Conns | RET (SRET) | AISG RET UID |
|-------|------------|-------|------------|----------------------|
| R1 | 698-960 | 1-2 | 1 | CPxxxxxxxxxxxxxxxxR1 |
| R2 | 698-960 | 3-4 | 2 | CPxxxxxxxxxxxxxxxxR2 |
| Y1 | 1695-2690 | 5-6 | 3 | CPxxxxxxxxxxxxxxxxY1 |
| Y2 | 1695-2690 | 7-8 | 4 | CPxxxxxxxxxxxxxxxxY2 |
| Y3 | 1695-2690 | 9-10 | 5 | CPxxxxxxxxxxxxxxxxY3 |
| Y4 | 1695-2690 | 11-12 | 6 | CPxxxxxxxxxxxxxxxxY4 |

Left Bottom Right

(Sizes of colored boxes are not true depictions of array sizes)

Port Configuration

RRV4-65B-R6-PS

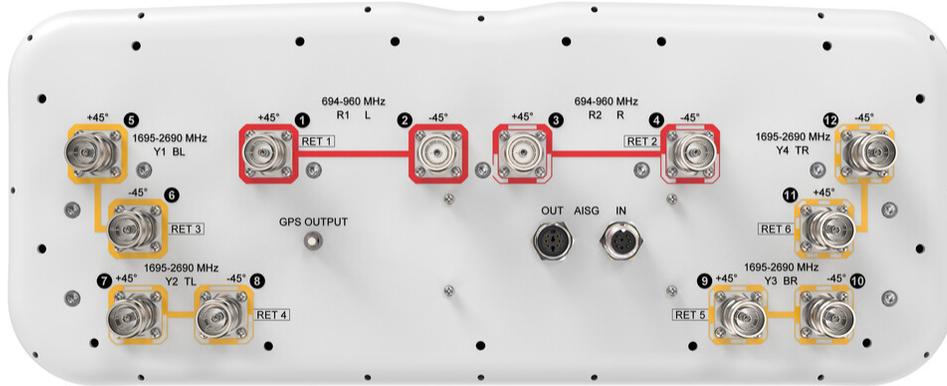

Electrical Specifications

| | |
|-----------------------------------|---------------------------------|
| Impedance | 50 ohm |
| Operating Frequency Band | 1695 – 2690 MHz 698 – 960 MHz |
| Polarization | ±45° |
| Total Input Power, maximum | 1,200 W @ 50 °C |

Mechanical Specifications

| | |
|---|---|
| Wind Loading @ Velocity, frontal | 633.0 N @ 150 km/h (142.3 lbf @ 150 km/h) |
| Wind Loading @ Velocity, lateral | 192.0 N @ 150 km/h (43.2 lbf @ 150 km/h) |
| Wind Loading @ Velocity, maximum | 760.0 N @ 150 km/h (170.9 lbf @ 150 km/h) |
| Wind Loading @ Velocity, rear | 436.0 N @ 150 km/h (98.0 lbf @ 150 km/h) |
| Wind Speed, maximum | 241 km/h (150 mph) |

Packaging and Weights

| | |
|-----------------------|----------------------|
| Width, packed | 565 mm 22.244 in |
| Depth, packed | 309 mm 12.165 in |
| Length, packed | 2046 mm 80.551 in |
| Weight, gross | 49.6 kg 109.349 lb |

RRV4-65B-R6-PS

Regulatory Compliance/Certifications

| Agency | Classification |
|---------------|--|
| CHINA-ROHS | Above maximum concentration value |
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |
| ROHS | Compliant/Exempted |
| UK-ROHS | Compliant/Exempted |



Included Products

- BSAMNT-3 – Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.

* Footnotes

Performance Note Severe environmental conditions may degrade optimum performance

BSAMNT-3



Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.

Product Classification

Product Type Downtilt mounting kit

General Specifications

Application Outdoor

Color Silver

Dimensions

Compatible Diameter, maximum 115 mm | 4.528 in

Compatible Diameter, minimum 60 mm | 2.362 in

Weight, net 6.2 kg | 13.669 lb

Material Specifications

Material Type Galvanized steel

Packaging and Weights

Included Brackets | Hardware

Packaging quantity 1

Weight, gross 6.4 kg | 14.11 lb

Regulatory Compliance/Certifications

| Agency | Classification |
|---------------|--|
| CE | Compliant with the relevant CE product directives |
| CHINA-ROHS | Below maximum concentration value |
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |
| REACH-SVHC | Compliant as per SVHC revision on www.andrew.com/ProductCompliance |
| ROHS | Compliant |
| UK-ROHS | Compliant |

BSAMNT-3

