


760253616 | C-096-LA-8W-M12BK/25G/GRP/AJ/E



Fiber indoor/outdoor cable, TeraSPEED® Single Jacket/Single GRP Armor, Gel-filled, Stranded Loose Tube, Singlemode G.652.D and G.657.A1, Meters jacket marking, Black jacket color. Provides Rodent Resistance.

- Corrugated steel tape armor is strong yet flexible, providing additional crush and rodent protection

Product Classification

Regional Availability	Asia Australia/New Zealand EMEA Latin America
Portfolio	CommScope®
Product Type	Fiber indoor/outdoor cable
Product Series	C-LA


General Specifications

Armor Type	Non-metallic rods
Cable Type	Stranded loose tube
Construction Type	Armored
Subunit Type	Gel-filled
Jacket Color	Black
Jacket Marking	Custom printing
Jacket Marking Method	Laser
Jacket Marking Text	COMMScope GB OPTICAL CABLE 760253616 96 x G652D SM LSZH EN50575 CLASS E [DOM] [SERIAL NUMBER] [METER MARK]
Subunit, quantity	8
Fibers per Subunit, quantity	12
Total Fiber Count	96

Dimensions

Buffer Tube/Subunit Diameter	2.5 mm 0.098 in
Diameter Over Jacket	17.7 mm 0.697 in

Representative Image

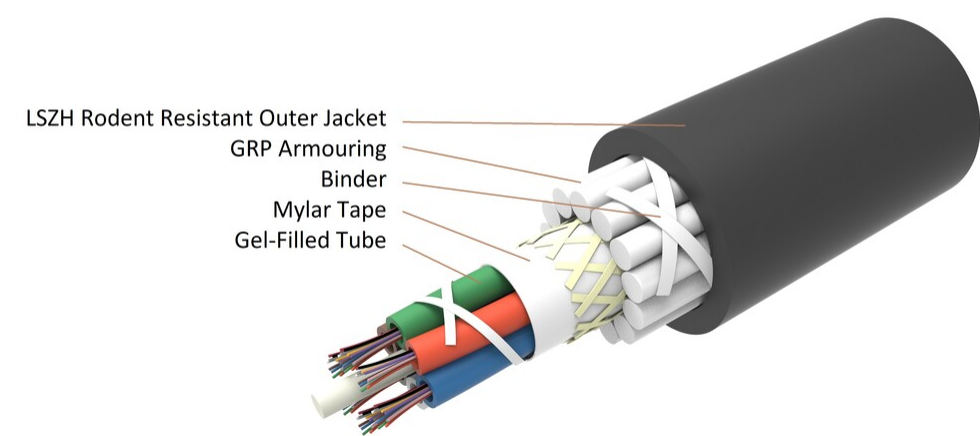

Mechanical Specifications

Minimum Bend Radius, loaded	400 mm 15.748 in
Minimum Bend Radius, unloaded	270 mm 10.63 in
Tensile Load, long term, maximum	5000 N 1,124.045 lbf
Compression	30 N/mm 171.304 lb/in
Compression Test Method	IEC 60794-1 E3
Flex	25 cycles
Impact	5 N-m 44.254 in lb
Impact Test Method	IEC 60794-1 E4
Strain	See long and short term tensile loads
Strain Test Method	IEC 60794-1 E1
Twist	5 cycles
Twist Test Method	IEC 60794-1 E7

Optical Specifications

Fiber Type	G.652.D and G.657.A1, TeraSPEED® OS2 OS2
------------	--

Environmental Specifications

Installation temperature	-20 °C to +70 °C (-4 °F to +158 °F)
--------------------------	-------------------------------------

760253616 | C-096-LA-8W-M12BK/25G/GRP/AJ/E

Operating Temperature	-20 °C to +70 °C (-4 °F to +158 °F)
Storage Temperature	-20 °C to +70 °C (-4 °F to +158 °F)
Cable Qualification Standards	IEC 60794-1-2
Environmental Space	Aerial, lashed Buried
Flame Test Method	IEC 60332-1-2
Jacket UV Resistance	UV stabilized
Water Penetration	24 h
Water Penetration Test Method	IEC 60794-1 F5

Environmental Test Specifications

Heat Age	-20 °C to +85 °C (-4 °F to +185 °F)
Heat Age Test Method	IEC 60794-1 F9
Low High Bend	-20 °C to +70 °C (-4 °F to +158 °F)
Low High Bend Test Method	IEC 60794-1 E11
Temperature Cycle	-20 °C to +70 °C (-4 °F to +158 °F)
Temperature Cycle Test Method	IEC 60794-1 F1

Packaging and Weights

Cable weight	328 kg/km 220.406 lb/kft
--------------	----------------------------

Included Products

- CS-8W-LT
- TeraSPEED® G652D/G657A1 Singlemode Fiber

* Footnotes

Operating Temperature Specification applicable to non-terminated bulk fiber cable