



Fiber indoor/outdoor cable, loose tube gel-filled CST, 24 fiber, Multimode OM4, Meters jacket marking, Black jacket color

Product Classification

| | |
|-----------------------|------------------------------|
| Regional Availability | Asia Australia/New Zealand |
| Portfolio | CommScope® |
| Product Type | Fiber indoor/outdoor cable |
| Product Series | C-LA |


General Specifications

| | |
|------------------------------|---------------------|
| Armor Type | Corrugated steel |
| Cable Type | Stranded loose tube |
| Construction Type | Armored |
| Subunit Type | Gel-filled |
| Filler, quantity | 2 |
| Jacket Color | Black |
| Jacket Marking | Meters |
| Subunit, quantity | 4 |
| Fibers per Subunit, quantity | 6 |
| Total Fiber Count | 24 |

Dimensions

| | |
|------------------------------|--------------------|
| Buffer Tube/Subunit Diameter | 2.1 mm 0.083 in |
| Diameter Over Jacket | 11.9 mm 0.469 in |

Representative Image

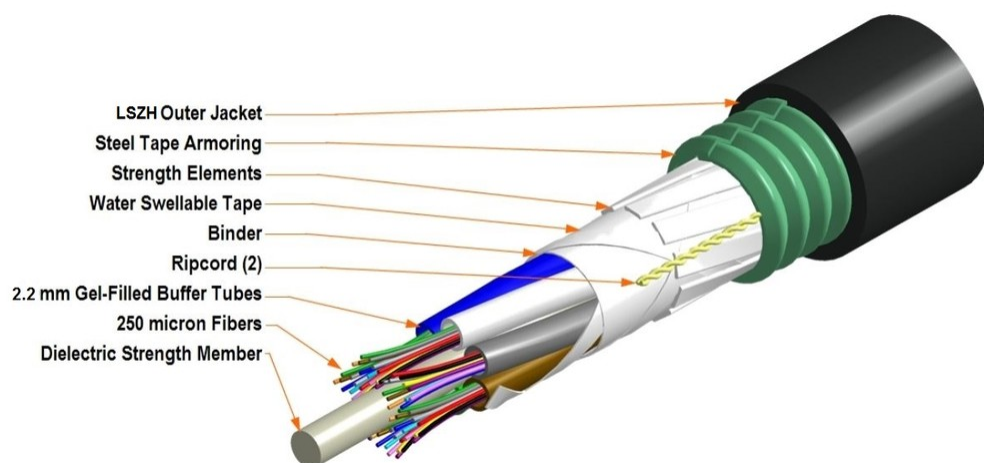

Mechanical Specifications

| | |
|--|---------------------------------------|
| Minimum Bend Radius, loaded | 238 mm 9.37 in |
| Minimum Bend Radius, unloaded | 119 mm 4.685 in |
| Tensile Load, short term, maximum | 2000 N 449.618 lbf |
| Compression | 15 N/mm 85.652 lb/in |
| Compression Test Method | IEC 60794-1-2 E3 |
| Strain | See long and short term tensile loads |
| Strain Test Method | IEC 60794-1-21 E1 |

Optical Specifications

| | |
|------------|-----|
| Fiber Type | OM4 |
|------------|-----|

Optical Specifications, Wavelength Specific

| | |
|-----------------------------|---|
| Attenuation, maximum | 1.00 dB/km @ 1,300 nm 3.00 dB/km @ 850 nm |
|-----------------------------|---|

Environmental Specifications

| | |
|--------------------------------------|--|
| Installation temperature | -10 °C to +60 °C (+14 °F to +140 °F) |
| Operating Temperature | -40 °C to +70 °C (-40 °F to +158 °F) |
| Storage Temperature | -40 °C to +70 °C (-40 °F to +158 °F) |
| Environmental Space | Buried Ducted Indoor/Outdoor Low Smoke Zero Halogen (LSZH) |
| Flame Test Method | IEC 60332-1 IEC 60332-3-24 IEC 60754-2 IEC 61034-2 |
| Water Penetration | 24 h |
| Water Penetration Test Method | IEC 60794-1 F5B |

Environmental Test Specifications

| | |
|-------------------------------|--------------------------------------|
| Temperature Cycle | -40 °C to +70 °C (-40 °F to +158 °F) |
| Temperature Cycle Test Method | IEC 60794-1-2 F1 |

Packaging and Weights

| | |
|--------------|----------------------------|
| Cable weight | 164 kg/km 110.203 lb/kft |
|--------------|----------------------------|

Regulatory Compliance/Certifications

| Agency | Classification |
|------------|--|
| CHINA-ROHS | Below maximum concentration value |
| REACH-SVHC | Compliant as per SVHC revision on www.commscope.com/ProductCompliance |
| ROHS | Compliant |
| UK-ROHS | Compliant |



* Footnotes

| | |
|-----------------------|---|
| Operating Temperature | Specification applicable to non-terminated bulk fiber cable |
|-----------------------|---|