


# ARGMPLCGD

Base Product

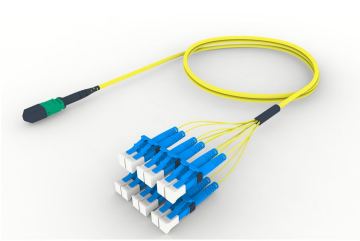

Ultra Low Loss (ULL) Singlemode MPO12 (Unpinned) to LC/UPC, Fiber Extension Cable Assembly, 12-Fiber, Low Smoke Zero Halogen, Method-A Polarity: Method A

## Product Classification

Regional Availability	Asia   Australia/New Zealand   Europe   Latin America   Middle East /Africa   North America
Portfolio	CommScope®
Product Type	Fiber array cable assembly
Product Brand	SYSTIMAX ULL
Ordering Note	For additional jacket colors, please contact a CommScope Sales Representative   For lengths greater than 999 ft (304 m), orders must be in meters   Minimum length may vary based on cable configuration

## General Specifications


Color, boot A	Black
Color, connector A	Green
Color, boot B	Blue
Color, connector B	Blue
Construction Type	Stranded
Furcation Color	Yellow
Interface, Connector A	MPO-12/APC Female
Interface, Connector B	LC/UPC
Jacket Color	Yellow
Polarity	Method A
Fibers per Subunit, quantity	12
Total Fibers, quantity	12

## Dimensions

# ARGMPLCGD

Cable Assembly Length Range (m)	1 – 304
Cable Assembly Length Range (ft)	2 – 999

## Ordering Tree

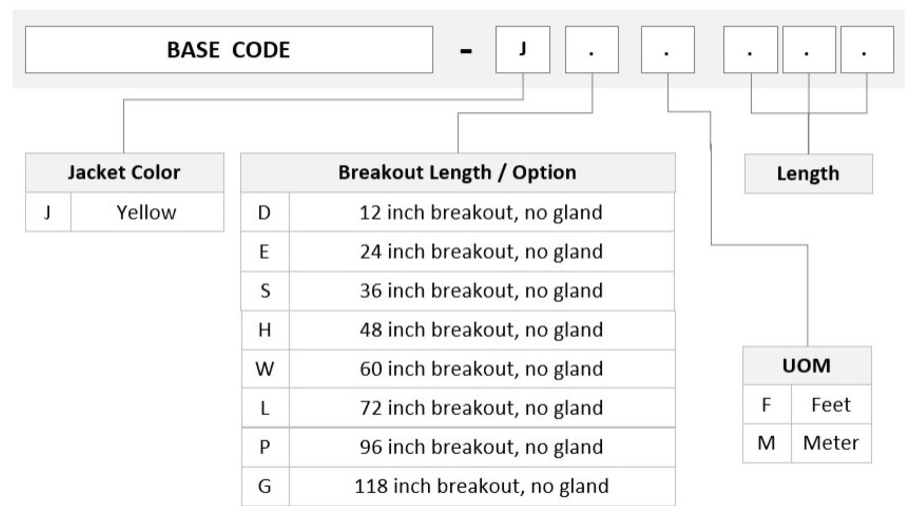

## Mechanical Specifications

Cable Retention Strength, maximum	11.24 lb @ 0 °   4.40 lb @ 90 °
-----------------------------------	---------------------------------

## Optical Specifications

Fiber Mode	Singlemode
Fiber Type	G.657.A2, TeraSPEED®

## Environmental Specifications

Operating Temperature	-10 °C to +60 °C (+14 °F to +140 °F)
Environmental Space	Indoor   Low Smoke Zero Halogen (LSZH)

## Regulatory Compliance/Certifications

Agency	Classification
ANATEL	Compliant
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system



# ARGMPLCGD

---

## Included Products

- |                                   |   |   |
|-----------------------------------|---|---|
| 760237972<br>N-012-MP-8G1-F30YL/D | - | Fiber Indoor Cable, Low Smoke Zero Halogen Riser Light Duty MPO Patchcord Cable, 12 fiber, gel-free, singlemode G.657.A2/B2, feet jacket marking, yellow cable jacket color, Dca Flame Rating |
| 860637435                         | - | LC/UPC Connector, Singlemode, Blue, Short Boot  |
| 860638318                         | - | MPO12, ULTRA LOW LOSS, FEMALE, Singlemode, GREEN, 3mm   |