

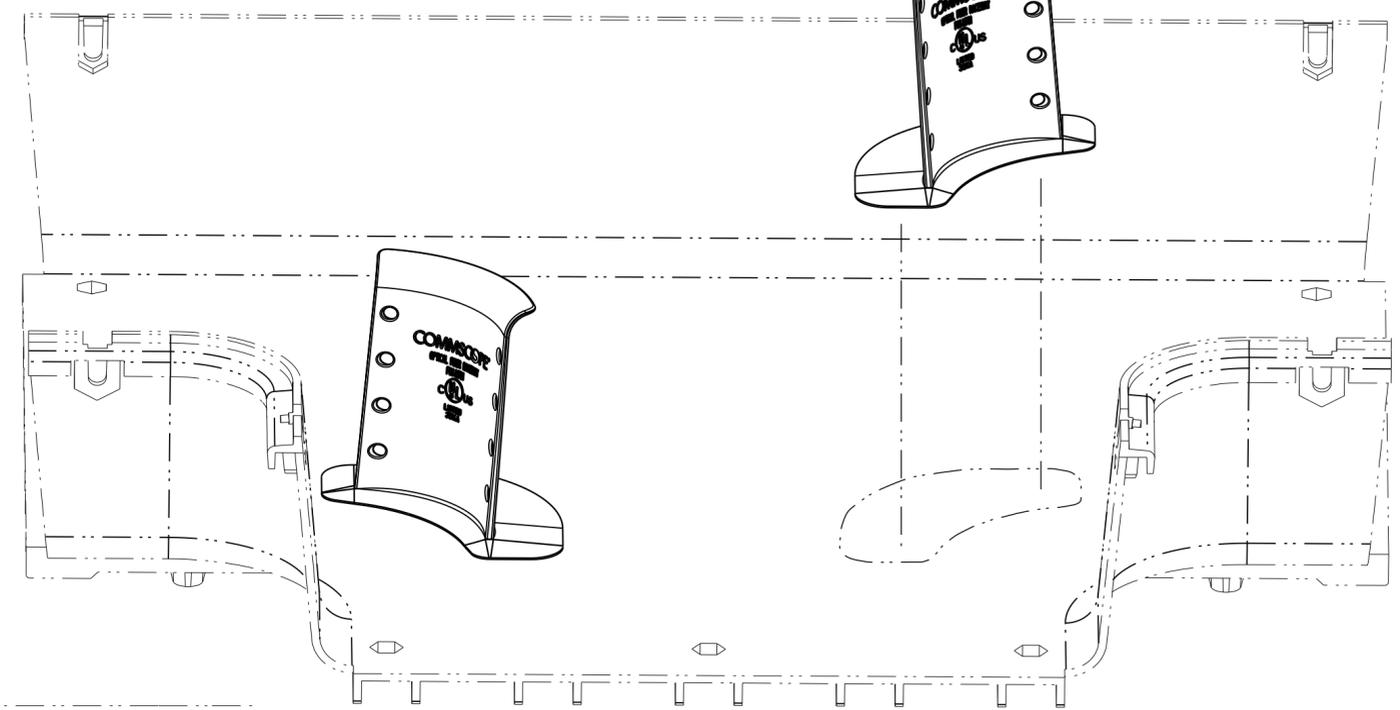


REV.	MCO	DWN	DATE
A	20099549	JRA	13-SEP-01
B	40031557MCO	OAVL	17-JUN-16

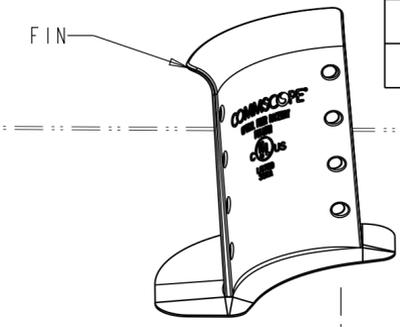

TOP VIEW

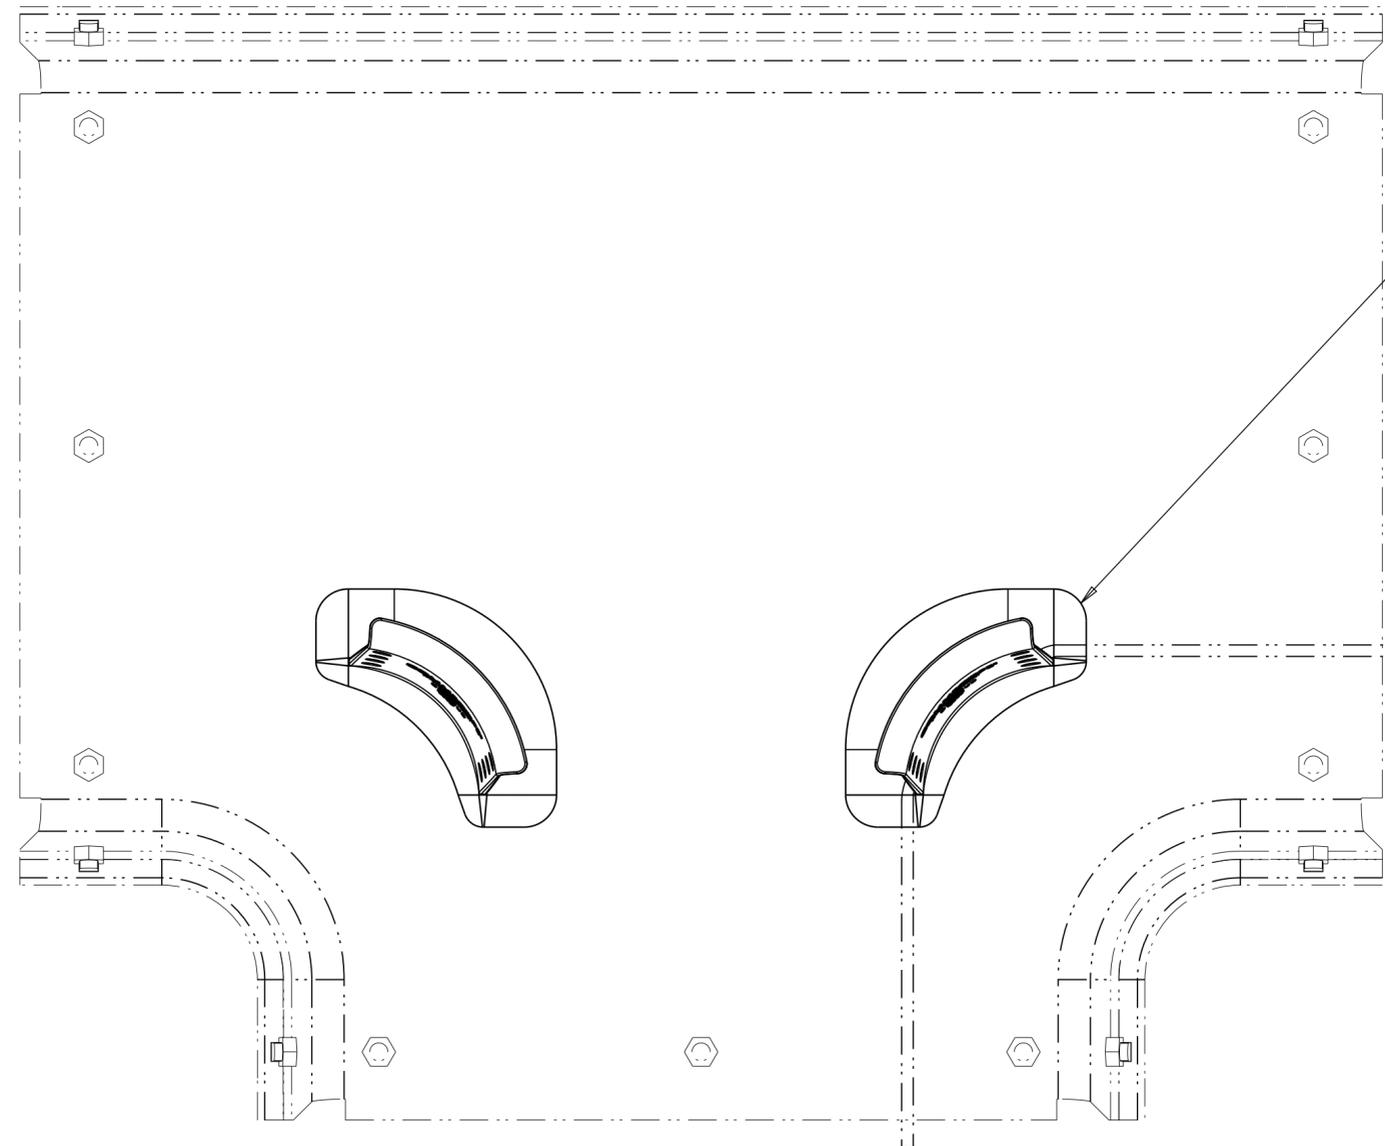

**NOTES:**

1. FIN SHOULD BE STORED AT ROOM TEMPERATURE FOR OPTIMUM PERFORMANCE.
2. SHELF LIFE : 12 MONTHS.
3. IDEAL APPLICATION TEMPERATURE RANGE IS 70°F TO 100°F. MINIMUM APPLICATION TEMPERATURE IS 60°F.
4. TO OBTAIN OPTIMUM ADHESION, THE BONDING SURFACE MUST BE CLEAN AND DRY. TYPICAL SURFACE CLEANING SOLVENTS ARE ISOPROPYL ALCOHOL/WATER MIXTURE (RUBBING ALCOHOL).  
  
NOTE: BE SURE TO FOLLOW SOLVENT MANUFACTURES PRECAUTIONS AND DIRECTIONS FOR USE WHEN USING SOLVENTS.
5. PREDETERMINE LOCATION (SEE TOP VIEW) OF FIN IN TROUGH BEFORE REMOVING ADHESIVE LINER. ONCE FIN IS BONDED IN PLACE, IT CANNOT BE REMOVED.
6. REMOVE ADHESIVE LINER AND POSITION FIN IN TROUGH. APPLY FIRM PRESSURE OVER ENTIRE FIN BASE TO ENSURE A FULL BOND.

COMMSCOPE, INC.

© 2016 COMMSCOPE, INC. CONFIDENTIAL NOTICE: THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPRIETARY PROPERTY OF COMMSCOPE, INC. AND MAY BE USED ONLY FOR THE SPECIFIC PURPOSE AUTHORIZED IN WRITING BY COMMSCOPE, INC.		TITLE INSERT, FIN, W/TAPE, FGS INSTALLATION DWG	
ALL DIMS AND TOLERANCES ARE INCHES UNLESS OTHERWISE SPECIFIED	.XX:±.xx .XXX:±.xxx ANGULAR:±N/A	C SIZE DRAWING NUMBER 1195947_ADC	B REV
DO NOT SCALE DRAWING	ENGR: M. FERRIS DWN: J. ANDERSON	SHT. 1 OF 1	

DIMENSIONS IN INCHES  
THIRD ANGLE PROJECTION