# PM-238T-48



Adjustable Tapered Pipe Mount, 2-3/8 in OD x 48 in

## Product Classification

Product Type

Pipe mount

## General Specifications

Mounting	Saddle mounts
Note	One 96 in x 8 in panel antenna per pipe mount
Pipe, quantity	1
Tower Taper	Tapered
Dimensions	
Height	1,219.2 mm   48 in
Width	152.4 mm   6 in
Length	152.4 mm   6 in
Pipe Length	1,219.2 mm   48 in
Pipe Outer Diameter	60.96 mm   2.4 in


Page 1 of 3



©2025 ANDREW, an Amphenol company. All rights reserved. Amphenol and ANDREW are registered trademarks of Amphenol and/or its affiliates in the U.S. and other countries. All product names, trademarks and registered trademarks are property of their respective owners. Revised: March 12, 2025

# PM-238T-48

# Outline Drawing

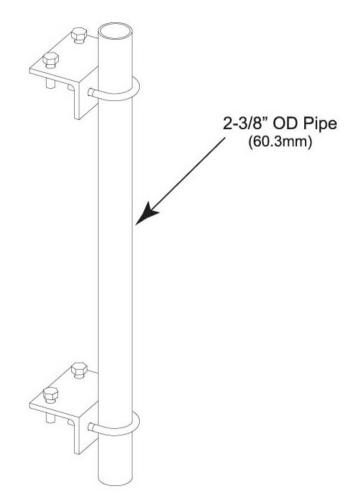

### Material Specifications

Material Type

Hot dip galvanized steel

# Mechanical Specifications

Wind Rating	120 mph (BWS) at 150 ft AGL
Wind Rating Test Method	TIA/EIA-222

# Packaging and Weights

Included

1

Brackets | Hardware | Pipe

Packaging quantity

Page 2 of 3



©2025 ANDREW, an Amphenol company. All rights reserved. Amphenol and ANDREW are registered trademarks of Amphenol and/or its affiliates in the U.S. and other countries. All product names, trademarks and registered trademarks are property of their respective owners. Revised: March 12, 2025

# PM-238T-48

#### Weight, net

6.4 kg | 14.11 lb

### Regulatory Compliance/Certifications

#### Agency Classification

ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system

#### Included Products

- MT-650 Plain End Pipe, 2-3/8 in OD x 48 in .120" A500C 46Ksi
- PM-TK Pipe Mount Taper Kit

### \* Footnotes

Wind Rating BWS-Base Wind Speed; FBC-Florida Building Code

