

3.6m | 12ft Sentinel® Ultra High Performance, Super High XPD Antenna, dual-polarized, 4.400 – 5.000 GHz, grey, CPR187G flange

2

1.2°

#### **Product Classification**

Product Type Microwave antenna

General Specifications

Antenna Type USX - Sentinel® Ultra High Performance, Super

High XPD Antenna, dual-polarized

**Polarization** Dual

Antenna Input CPR187G

Antenna Color Gray

**Reflector Construction**Two-piece reflector

Radome ColorGrayRadome MaterialFabricFlash IncludedYes

Side Struts, Included

Side Struts, Optional 3

**Dimensions** 

Beamwidth, Vertical

**Diameter, nominal** 3.6 m | 12 ft

**Electrical Specifications** 

Operating Frequency Band 4.400 - 5.000 GHz

Gain, Low Band41.6 dBiGain, Mid Band42.2 dBiGain, Top Band42.7 dBiBoresite Cross Polarization Discrimination (XPD)40 dB

Front-to-Back Ratio 74 dB

Beamwidth, Horizontal 1.2 °

ANDREW®
an Amphenol company

Page 1 of 7

**Return Loss** 23 dB

**VSWR** 1.15

Radiation Pattern Envelope Reference (RPE) 7432

Electrical Compliance ETSI 302 217 Class 3

Cross Polarization Discrimination (XPD) Electrical Compliance ETSI EN 302217 XPD Category 3

Mechanical Specifications

Compatible Mounting Pipe Diameter 115 mm | 4.5 in

Fine Azimuth Adjustment Range ±5°


Fine Elevation Adjustment Range  $\pm 5^{\circ}$ 

 Wind Speed, operational
 180 km/h | 111.847 mph

 Wind Speed, survival
 200 km/h | 124.274 mph

## Antenna Dimensions and Mounting Information

#### HX/USX12

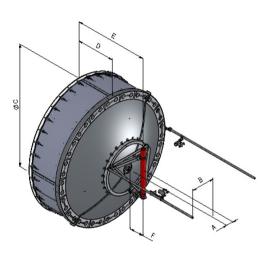

| Dimensions in inches (mm) |              |               |                 |                |                |               |
|---------------------------|--------------|---------------|-----------------|----------------|----------------|---------------|
| Antenna size, ft<br>(m)   | А            | В             | С               | ۵              | E              | F             |
| 12<br>(3.6)               | 8.5<br>(216) | 28.2<br>(715) | 149.3<br>(3793) | 46.3<br>(1177) | 81.5<br>(2069) | 10.6<br>(269) |

### Wind Forces at Wind Velocity Survival Rating

**Axial Force (FA)** 26750 N | 6,013.641 lbf

Angle  $\alpha$  for MT Max  $-120^{\circ}$ 

**Side Force (FS)** 9450 N | 2,124.445 lbf

• •

**Twisting Moment (MT)** -17550 N-m | -155,330.594 in lb

Force on Inboard Strut Side 13000 N | 2,922.517 lbf

Force on Outboard Strut Side 4500 N | 1,011.64 lbf

**Zcg without Ice** 708 mm | 27.874 in


**Zcg with 1/2 in (12 mm) Radial Ice** 854 mm | 33.622 in

ANDREW®
an Amphenol company

Weight with 1/2 in (12 mm) Radial Ice

656 kg | 1,446.231 lb

## Wind Forces at Wind Velocity Survival Rating Image

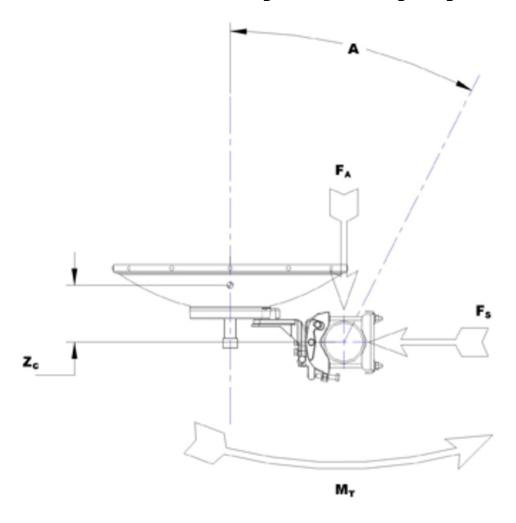

#### Packaging and Weights

 Height, packed
 1530 mm
 | 60.236 in

 Width, packed
 2140 mm
 | 84.252 in

**Length, packed** 3990 mm | 157.087 in

Packaging Type Standard pack

 Volume
 13 m³ | 459.091 ft³

 Weight, gross
 661 kg | 1,457.254 lb

 Weight, net
 361 kg | 795.868 lb

Regulatory Compliance/Certifications



Agency Classification

CHINA-ROHS Below maximum concentration value

ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system

REACH-SVHC Compliant as per SVHC revision on www.andrew.com/ProductCompliance

ROHS Compliant UK-ROHS Compliant



#### \* Footnotes

**Operating Frequency Band**Bands correspond with CCIR recommendations or common

allocations used throughout the world. Other ranges can be

accommodated on special order.

Gain, Mid Band For a given frequency band, gain is primarily a function of

antenna size. The gain of Andrew antennas is determined by either gain by comparison or by computer integration of the

measured antenna patterns.

**Boresite Cross Polarization Discrimination (XPD)**The difference between the peak of the co-polarized main

beam and the maximum cross-polarized signal over an angle twice the 3 dB beamwidth of the co-polarized main beam.

**Front-to-Back Ratio**Denotes highest radiation relative to the main beam, at 180°

±40°, across the band. Production antennas do not exceed rated values by more than 2 dB unless stated otherwise.

**Return Loss**The figure that indicates the proportion of radio waves

incident upon the antenna that are rejected as a ratio of

those that are accepted.

**VSWR** Maximum; is the guaranteed Peak Voltage-Standing-Wave-

Ratio within the operating band.

**Radiation Pattern Envelope Reference (RPE)**Radiation patterns define an antenna's ability to discriminate

against unwanted signals. Under still dry conditions, production antennas will not have any peak exceeding the current RPE by more than 3dB, maintaining an angular

accuracy of +/-1° throughout

**Cross Polarization Discrimination (XPD) Electrical Compliance** The difference between the peak of the co-polarized main

beam and the maximum cross-polarized signal over an angle twice the 3 dB beamwidth of the co-polarized main beam.

Wind Speed, operational For VHLP(X), SHP(X), HX and USX antennas, the wind speed

where the maximum antenna deflection is 0.3 x the 3 dB beam width of the antenna. For other antennas, it is defined

Page 6 of 7



wind Speed, survival as a deflection is equal to or less than 0.1 degrees.

The maximum wind speed the antenna, including n

The maximum wind speed the antenna, including mounts and radomes, where applicable, will withstand without permanent deformation. Realignment may be required. This wind speed is applicable to antenna with the specified amount of radial ice.

Maximum forces exerted on a supporting structure as a result of wind from the most critical direction for this parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the mounting pipe.

Maximum side force exerted on the mounting pipe as a result of wind from the most critical direction for this parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the mounting pipe.

Maximum forces exerted on a supporting structure as a result of wind from the most critical direction for this parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the mounting pipe.

Andrew standard packing is suitable for export. Antennas are shipped as standard in totally recyclable cardboard or wirebound crates (dependent on product). For your convenience, Andrew offers heavy duty export packing options.

**Axial Force (FA)** 

Side Force (FS)

**Twisting Moment (MT)** 

**Packaging Type**