


# U4GLULUCL

## Base Product

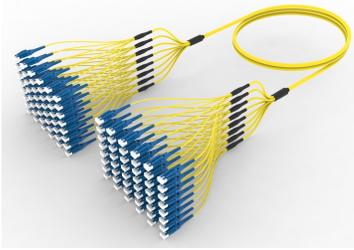

Ultra Low Loss ULL TeraSPEED® LC/UPC Uniboot to LC/UPC Uniboot Ruggedized fanout Cable, 96-Fiber, LSZH, 12 fiber PmP 2.0 mm /B2ca

## Product Classification

### Regional Availability

Asia | Australia/New Zealand | Europe | Latin America | Middle East/Africa | North America

### Portfolio

CommScope®

### Product Type

Ruggedized fanout

### Product Brand

SYSTIMAX ULL

### Ordering Note

For additional jacket colors, please contact a CommScope Sales Representative | For lengths greater than 999 ft (304 m), orders must be in meters | Minimum length may vary based on cable configuration

## General Specifications

### Color, boot A

Blue

### Color, connector A

Green

### Color, boot B

Blue

### Color, connector B

Blue

### Construction Type

Stranded

### Furcation Color

Yellow

### Interface, Connector A

LC/UPC

### Interface Feature, connector A

Uniboot

### Interface, Connector B

LC/UPC

### Interface Feature, connector B

Uniboot

### Jacket Color

Yellow

### Fibers per Subunit, quantity

12

### Total Fibers, quantity

96

## Dimensions

### Cable Assembly Length Range (m)

3 – 999

# U4GLULUCL

---

**Cable Assembly Length Range (ft)** 8 – 999

## Optical Specifications

**Fiber Mode** Singlemode

**Fiber Type** G.657.A2, TeraSPEED®

## Environmental Specifications

**Operating Temperature** -10 °C to +60 °C (+14 °F to +140 °F)

**EN50575 CPR Cable EuroClass Fire Performance** B2ca

**Environmental Space** Indoor | Low Smoke Zero Halogen (LSZH)

## Regulatory Compliance/Certifications


Agency	Classification
ANATEL	Compliant
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a>
ROHS	Compliant
UK-ROHS	Compliant



## Included Products

760249610 N-096-MP-8G1-F12YL/20T/B2	–	Fiber indoor cable, Low Smoke Zero Halogen Riser MPO Trunk, 96 fiber with 2.0 mm Subunits, Singlemode G.657.A2, Feet jacket marking, Yellow jacket color, B2ca flame rating
--	---	---

# 760249610 | N-096-MP-8G1-F12YL/20T/B2

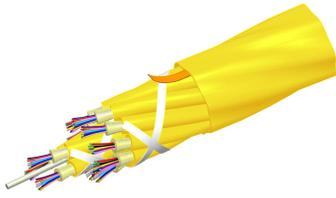

Fiber indoor cable, Low Smoke Zero Halogen Riser MPO Trunk, 96 fiber with 2.0 mm Subunits, Singlemode G.657.A2, Feet jacket marking, Yellow jacket color, B2ca flame rating

## Product Classification

<b>Regional Availability</b>	Asia   Australia/New Zealand   EMEA
<b>Portfolio</b>	CommScope®
<b>Product Type</b>	Fiber indoor cable
<b>Product Series</b>	N-MP


## General Specifications

<b>Cable Type</b>	MPO trunk cable
<b>Construction Type</b>	Non-armored
<b>Subunit Type</b>	Gel-free
<b>Jacket Color</b>	Yellow
<b>Jacket Marking</b>	Feet
<b>Subunit, quantity</b>	8
<b>Fibers per Subunit, quantity</b>	12
<b>Total Fiber Count</b>	96

## Dimensions

<b>Buffer Tube/Subunit Diameter</b>	2 mm   0.079 in
<b>Diameter Over Jacket</b>	10.1 mm   0.398 in

## Representative Image

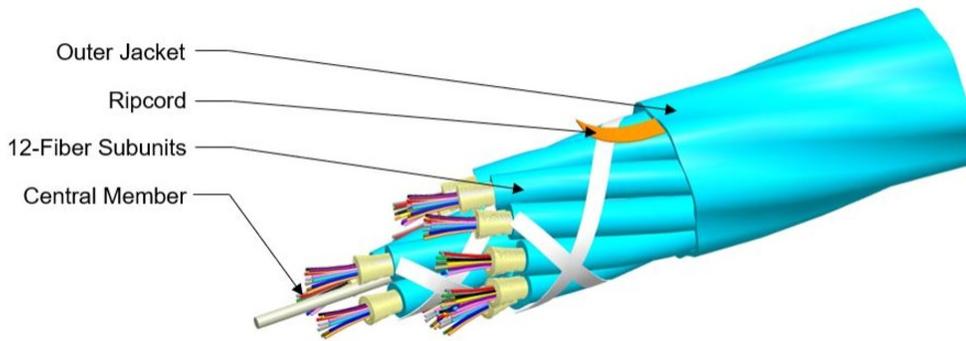

## Mechanical Specifications

<b>Minimum Bend Radius, loaded</b>	152 mm   5.984 in
<b>Minimum Bend Radius, unloaded</b>	101 mm   3.976 in
<b>Tensile Load, long term, maximum</b>	200 N   44.962 lbf
<b>Tensile Load, short term, maximum</b>	667 N   149.948 lbf
<b>Compression</b>	10 N/mm   57.101 lb/in
<b>Compression Test Method</b>	FOTP-41   IEC 60794-1 E3
<b>Flex</b>	25 cycles
<b>Flex Test Method</b>	FOTP-104   IEC 60794-1 E6
<b>Impact</b>	2.94 N-m   26.021 in lb
<b>Impact Test Method</b>	FOTP-25   IEC 60794-1 E4
<b>Strain</b>	See long and short term tensile loads
<b>Strain Test Method</b>	FOTP-33   IEC 60794-1 E1
<b>Twist</b>	10 cycles
<b>Twist Test Method</b>	FOTP-85   IEC 60794-1 E7
<b>Vertical Rise, maximum</b>	190 m   623.36 ft

## Optical Specifications

<b>Fiber Type</b>	G.657.A2   G.657.A2/B2   OS2
-------------------	------------------------------

## Environmental Specifications

<b>Installation temperature</b>	0 °C to +50 °C (+32 °F to +122 °F)
<b>Operating Temperature</b>	0 °C to +60 °C (+32 °F to +140 °F)

# 760249610 | N-096-MP-8G1-F12YL/20T/B2

---

<b>Storage Temperature</b>	-40 °C to +70 °C (-40 °F to +158 °F)
<b>Cable Qualification Standards</b>	ANSI/ICEA S-83-596   Telcordia GR-409
<b>EN50575 CPR Cable EuroClass Fire Performance</b>	B2ca
<b>EN50575 CPR Cable EuroClass Smoke Rating</b>	s1a
<b>EN50575 CPR Cable EuroClass Droplets Rating</b>	d0
<b>EN50575 CPR Cable EuroClass Acidity Rating</b>	a1
<b>Environmental Space</b>	Low Smoke Zero Halogen (LSZH)
<b>Flame Test Method</b>	IEC 60332-3   IEC 60754-2   IEC 61034-2

## Environmental Test Specifications

<b>Low High Bend</b>	0 °C to +50 °C (+32 °F to +122 °F)
<b>Low High Bend Test Method</b>	FOTP-37   IEC 60794-1 E11
<b>Temperature Cycle</b>	0 °C to +60 °C (+32 °F to +140 °F)
<b>Temperature Cycle Test Method</b>	FOTP-3   IEC 60794-1 F1

## Packaging and Weights

<b>Cable weight</b>	107.6 kg/km   72.304 lb/kft
---------------------	-----------------------------

## \* Footnotes

**Operating Temperature** Specification applicable to non-terminated bulk fiber cable