

Fiber indoor cable, LazrSPEED® Plenum for MPO Trunks, 24 fiber, Multimode OM5, Feet jacket marking, Lime green jacket color

Product Classification

Regional Availability	Asia   Australia/New Zealand   Latin America   Middle East /Africa   North America
Portfolio	CommScope®
Product Type	Fiber indoor cable
Product Series	P-MP


General Specifications

Cable Type	MPO trunk cable
Construction Type	Non-armored
Subunit Type	Gel-free
Jacket Color	Lime green
Jacket Marking	Feet
Subunit, quantity	1
Fibers per Subunit, quantity	24
Total Fiber Count	24

Dimensions

Buffer Tube/Subunit Diameter	3.6 mm   0.142 in
Diameter Over Jacket	5.46 mm   0.215 in

Representative Image

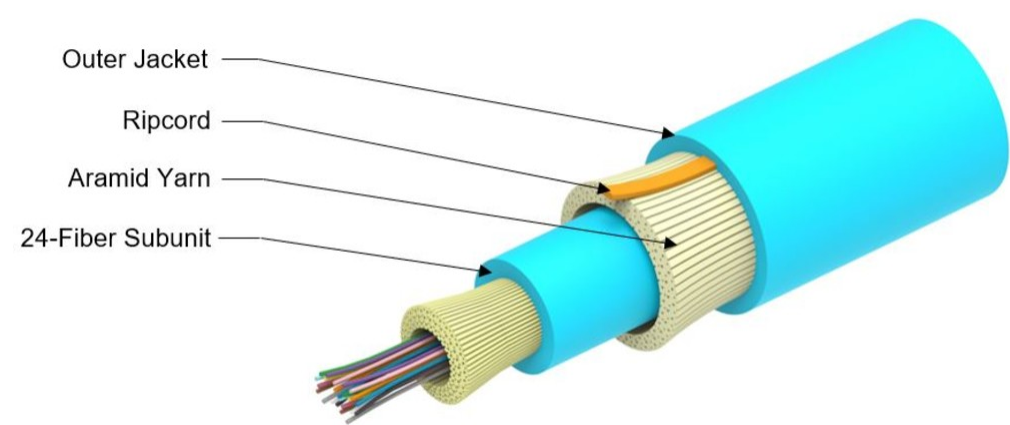

## Mechanical Specifications

Minimum Bend Radius, loaded	82 mm   3.228 in
Minimum Bend Radius, unloaded	55 mm   2.165 in
Tensile Load, long term, maximum	200 N   44.962 lbf
Tensile Load, short term, maximum	667 N   149.948 lbf
Compression	10 N/mm   57.101 lb/in
Compression Test Method	FOTP-41   IEC 60794-1 E3
Flex	300 cycles
Flex Test Method	FOTP-104   IEC 60794-1 E6
Impact	0.74 N-m   6.55 in lb
Impact Test Method	FOTP-25   IEC 60794-1 E4
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33   IEC 60794-1 E1
Twist	10 cycles
Twist Test Method	FOTP-85   IEC 60794-1 E7
Vertical Rise, maximum	500 m   1,640.42 ft

## Optical Specifications

Fiber Type	OM5, LazrSPEED® wideband   OM5, LazrSPEED® wideband
------------	---

## Environmental Specifications

Installation temperature	0 °C to +70 °C (+32 °F to +158 °F)
Operating Temperature	0 °C to +70 °C (+32 °F to +158 °F)

Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Cable Qualification Standards	ANSI/ICEA S-83-596   Telcordia GR-409
Environmental Space	Plenum
Flame Test Listing	NEC OFNP (ETL) and c(ETL)
Flame Test Method	NFPA 130   NFPA 262

Environmental Test Specifications

Heat Age	0 °C to +85 °C (+32 °F to +185 °F)
Heat Age Test Method	IEC 60794-1 F9
Low High Bend	0 °C to +70 °C (+32 °F to +158 °F)
Low High Bend Test Method	FOTP-37   IEC 60794-1 E11
Temperature Cycle	0 °C to +70 °C (+32 °F to +158 °F)
Temperature Cycle Test Method	FOTP-3   IEC 60794-1 F1

Packaging and Weights

Cable weight	29 kg/km   19.487 lb/kft
--------------	--------------------------

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
ROHS	Compliant
UK-ROHS	Compliant



Included Products

- CS-5G-MP
- LazrSPEED® OM5 WideBand Multimode Fiber

\* Footnotes

**Operating Temperature** Specification applicable to non-terminated bulk fiber cable

LazrSPEED®

LazrSPEED® OM5 WideBand Multimode Fiber

Product Classification

Portfolio	CommScope®
Product Type	Optical fiber

General Specifications

Cladding Diameter	125 µm
Cladding Diameter Tolerance	±5 µm
Cladding Non-Circularity, maximum	0.7 %
Coating Diameter (Colored)	254 µm
Coating Diameter (Uncolored)	242 µm
Coating Diameter Tolerance (Colored)	±7 µm
Coating Diameter Tolerance (Uncolored)	±5 µm
Coating/Cladding Concentricity Error, maximum	12 µm
Core Diameter	50 µm
Core Diameter Tolerance	±2.5 µm
Core/Clad Offset, maximum	1 µm
Proof Tensile Stress	100,000 psi (0.69 GPa)

Mechanical Specifications

Macrobending, 15 mm Ø mandrel, 2 turns	0.20 dB @ 850 nm   0.50 dB @ 1,300 nm
Macrobending, 30 mm Ø mandrel, 2 turns	0.10 dB @ 850 nm   0.30 dB @ 1,300 nm
Macrobending, 75 mm Ø mandrel, 100 turns	0.50 dB @ 1,300 nm   0.50 dB @ 850 nm
Coating Strip Force, maximum	4.5 N   1.012 lbf
Coating Strip Force, minimum	0.9 N   0.202 lbf
Dynamic Fatigue Parameter, minimum	18

Optical Specifications

Numerical Aperture	0.2
--------------------	-----

# CS-5G-MP

Numerical Aperture Tolerance	±0.010
Point Defects, maximum	0.15 dB
Zero Dispersion Slope, maximum (OM5)	-412/(840(1-(λ0/840)^4)) ps/[km-nm-nm]
Zero Dispersion Wavelength, maximum	1328 nm
Zero Dispersion Wavelength, minimum	1297 nm

## Optical Specifications, Wavelength Specific

1 Gbps Ethernet Distance	1,110 m @ 850 nm   600 m @ 1,300 nm
10 Gbps Ethernet Distance	550 m @ 850 nm
Attenuation, maximum	1.00 dB/km @ 1,300 nm   2.20 dB/km @ 953 nm   3.00 dB/km @ 850 nm
Bandwidth, Laser, minimum	2,600 MHz-km @ 953 nm   4,700 MHz-km @ 850 nm   500 MHz-km @ 1,300 nm
Bandwidth, OFL, minimum	1,950 MHz-km @ 953 nm   3,500 MHz-km @ 850 nm   500 MHz-km @ 1,300 nm
Index of Refraction	1.478 @ 1,300 nm   1.483 @ 850 nm
Standards Compliance	ANSI/TIA-492AAAF (OM5)   ANSI/TIA-568.3 (OM5)   IEC 60793-2-10, A1 (OM5)   ISO/IEC 11801-1 cabled optical fiber performance category OM5

## Environmental Specifications

Heat Aging, maximum	0.10 dB/km @ 85 °C
Temperature Dependence, maximum	0.1 dB/km
Temperature Humidity Cycling, maximum	0.1 dB/km
Water Immersion, maximum	0.10 dB/km @ 23 °C

## Regulatory Compliance/Certifications

Agency	Classification
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system

## \* Footnotes

Temperature Dependence, maximum	Temperature dependence is conducted at -60 °C to +85 °C (-76 °F to +185 °F)
Temperature Humidity Cycling, maximum	Temperature humidity cycling is conducted at -10 °C to +85 °C (+14 °F to +185 °F) up to 95% relative humidity