

# FFVV-65B-R2-V3



8-port sector antenna, 4x 617-894 and 4x 1695-2690 MHz, 65° HPBW, 2x RET

- Antenna includes 2xSingle Column X-Pol Arrays for 617-894MHz and 2xSingle Column X-Pol Arrays for 1695-2690MHz

## General Specifications

Antenna Type	Sector
Band	Multiband
Color	Light Gray (RAL 7035)
Grounding Type	RF connector inner conductor and body grounded to reflector and mounting bracket
Performance Note	Outdoor usage
Radome Material	Fiberglass, UV resistant
Reflector Material	Aluminum
RF Connector Interface	4.3-10 Female
RF Connector Location	Bottom
RF Connector Quantity, high band	0
RF Connector Quantity, mid band	4
RF Connector Quantity, low band	4
RF Connector Quantity, total	8

## Remote Electrical Tilt (RET) Information


RET Hardware	CommRET v2
RET Interface	8-pin DIN Female   8-pin DIN Male
RET Interface, quantity	1 female   1 male
Input Voltage	10–30 Vdc
Internal RET	Low band (1)   Mid band (1)
Power Consumption, active state, maximum	10 W
Power Consumption, idle state, maximum	2 W
Protocol	3GPP/AISG 2.0 (Single RET)

## Dimensions

# FFVV-65B-R2-V3

Width	498 mm   19.606 in
Depth	197 mm   7.756 in
Length	1828 mm   71.969 in
Net Weight, antenna only	32 kg   70.548 lb

## Array Layout

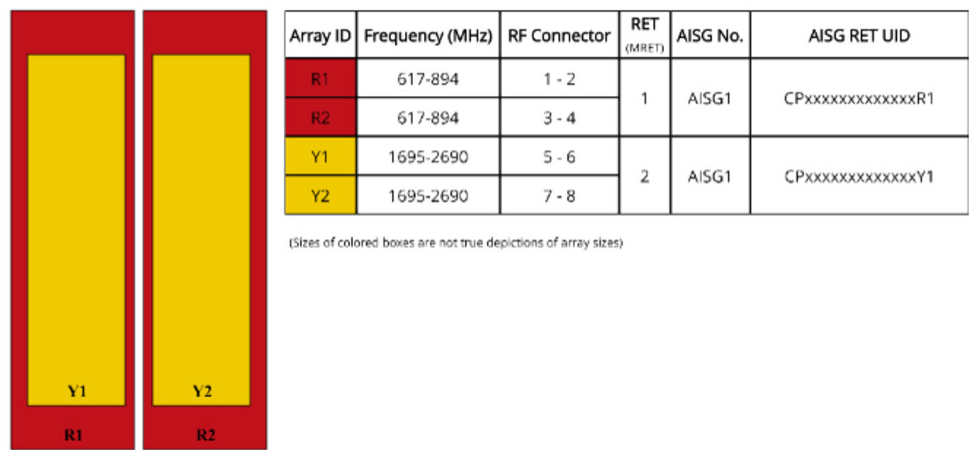

## Port Configuration



## Electrical Specifications

Impedance	50 ohm
Operating Frequency Band	1695 – 2690 MHz   617 – 894 MHz
Polarization	±45°
Total Input Power, maximum	900 W @ 50 °C

# FFVV-65B-R2-V3

## Electrical Specifications

	R1,R2	R1,R2	Y1,Y2	Y1,Y2	Y1,Y2	Y1,Y2	Y1,Y2
Frequency Band, MHz	617-728	758-894	1695-1880	1850-1990	1920-2200	2300-2500	2500-2690
RF Port	1,2,3,4	1,2,3,4	5,6,7,8	5,6,7,8	5,6,7,8	5,6,7,8	5,6,7,8
Gain, dBi	14.1	14.7	17.8	18.1	18.2	18.8	18.8
Beamwidth, Horizontal, degrees	64	65	70	71	68	52	43
Beamwidth, Vertical, degrees	14.3	12.6	5.6	5.3	5	4.5	4.2
Beam Tilt, degrees	2-14	2-14	2-12	2-12	2-12	2-12	2-12
USLS (First Lobe), dB	16	18	17	17	17	21	21
Front-to-Back Ratio at 180°, dB	28	28	33	38	37	33	30
CPR at Boresight, dB	17	17	19	21	18	16	20
Isolation, Cross Polarization, dB	25	25	25	25	25	25	25
Isolation, Inter-band, dB	25	25	25	25	25	25	25
VSWR   Return loss, dB	1.5   14.0	1.5   14.0	1.5   14.0	1.5   14.0	1.5   14.0	1.5   14.0	1.5   14.0
PIM, 3rd Order, 2 x 20 W, dBc	-150	-150	-150	-150	-150	-150	-150
Input Power per Port at 50°C, maximum, watts	250	250	200	200	200	200	200

## Mechanical Specifications

Effective Projective Area (EPA), frontal	0.58 m²   6.243 ft²
Effective Projective Area (EPA), lateral	0.18 m²   1.938 ft²
Wind Loading @ Velocity, frontal	622.0 N @ 150 km/h (139.8 lbf @ 150 km/h)
Wind Loading @ Velocity, lateral	188.0 N @ 150 km/h (42.3 lbf @ 150 km/h)
Wind Loading @ Velocity, maximum	746.0 N @ 150 km/h (167.7 lbf @ 150 km/h)
Wind Loading @ Velocity, rear	428.0 N @ 150 km/h (96.2 lbf @ 150 km/h)
Wind Speed, maximum	241 km/h (150 mph)

## Packaging and Weights

Width, packed	565 mm   22.244 in
Depth, packed	309 mm   12.165 in
Length, packed	2015 mm   79.331 in

# FFVV-65B-R2-V3

**Weight, gross** 45.6 kg | 100.531 lb

## Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a>
ROHS	Compliant
UK-ROHS	Compliant



## Included Products

BSAMNT-3	–	Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.
----------	---	--

## \* Footnotes

<b>Performance Note</b>	Severe environmental conditions may degrade optimum performance
-------------------------	---