



Fiber indoor/outdoor cable, loose tube gel-filled CST, 36 fiber, Multimode OM3, Meters jacket marking, Black jacket color

## Product Classification

Regional Availability	Asia   Australia/New Zealand
Portfolio	CommScope®
Product Type	Fiber indoor/outdoor cable
Product Series	C-LA


## General Specifications

Armor Type	Corrugated steel
Cable Type	Stranded loose tube
Construction Type	Armored
Subunit Type	Gel-filled
Filler, quantity	3
Jacket Color	Black
Jacket Marking	Meters
Subunit, quantity	3
Fibers per Subunit, quantity	12
Total Fiber Count	36

## Dimensions

Buffer Tube/Subunit Diameter	2.2 mm   0.087 in
Diameter Over Jacket	12.3 mm   0.484 in

## Representative Image

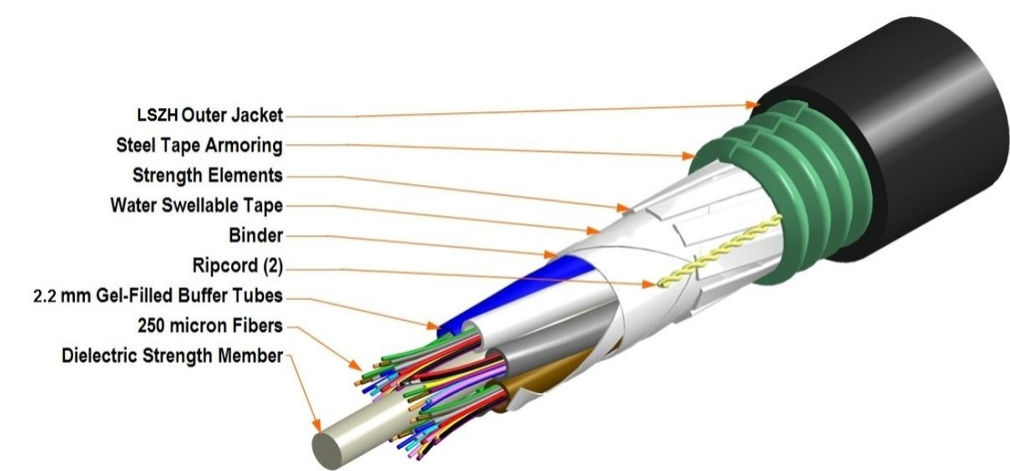

Mechanical Specifications

Minimum Bend Radius, loaded	246 mm   9.685 in
Minimum Bend Radius, unloaded	123 mm   4.843 in
Tensile Load, short term, maximum	2000 N   449.618 lbf
Compression	15 N/mm   85.652 lb/in
Compression Test Method	IEC 60794-1-2 E3
Strain	See long and short term tensile loads
Strain Test Method	IEC 60794-1-21 E1

Optical Specifications

Fiber Type	OM3
------------	-----

Optical Specifications, Wavelength Specific

Attenuation, maximum	1.00 dB/km @ 1,300 nm   3.00 dB/km @ 850 nm
----------------------	---

Environmental Specifications

Installation temperature	-10 °C to +60 °C (+14 °F to +140 °F)
Operating Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Environmental Space	Buried   Ducted   Indoor/Outdoor   Low Smoke Zero Halogen (LSZH)
Flame Test Method	IEC 60332-1   IEC 60332-3-24   IEC 60754-2   IEC 61034-2
Water Penetration	24 h
Water Penetration Test Method	IEC 60794-1 F5B

Environmental Test Specifications

Temperature Cycle	-40 °C to +70 °C (-40 °F to +158 °F)
Temperature Cycle Test Method	IEC 60794-1-2 F1

Packaging and Weights

Cable weight	171 kg/km   114.907 lb/kft
--------------	----------------------------

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a>
ROHS	Compliant
UK-ROHS	Compliant



\* Footnotes

Operating Temperature	Specification applicable to non-terminated bulk fiber cable
-----------------------	---